




HARVARD 500mA 10W DRIVER

LED power supplies
spec sheet PSCC-10-500-D-HA

DALI

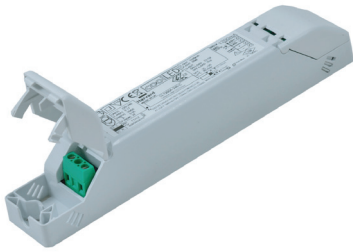

Category IP40
Input Voltage 220-230V AC
Mains Frequency 50/60Hz
Output Current 500ma
Output Power 10W
Dimming DALI
Weight 130g
Finish White
Max Distance ECG-Luminaire 10m
Compatibility Pico Surface [MPN-701] | Minimo [601, 602, 611, 621]
Luminaire Wiring Series circuit
Order Code PSCC-10-500-D-HA

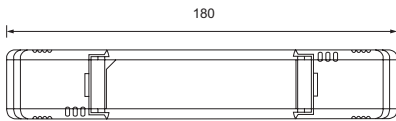

The Harvard LED driver is suitable for use with our constant current LED luminaires, Pico Surface and Minimo. It is for use with the luminaires wired in series. The driver has protection against overheating, open and short circuit, voltage spikes and surge protection. This power supply is dimmable with a DALI control signal.



Luminaire



Pico Surface



Minimo

Qty. Connected
Luminaires

3-6

3-6

PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA
t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626

Version 11.15