

DOMINO 1 BASIS TRACK

luminaires
spec sheet BT-651

NARROW SPOT



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium

System Basis Track

Accessories Lenses

System Power 2.5W

Module Output 178lm

Absolute Output 164lm

LOR 93%

Colour Temperature 3000K*



CRI Ra: 95 **TM-30** Rf: 93 Rg: 99

Optics 12°

Gear Type Dimmable options available


Weight 141g

* Please enquire as to the availability of non-standard colour temperatures.

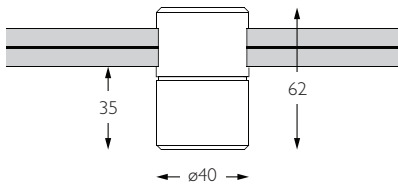


Domino 1 Basis Track is a low profile, track-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in brushed aluminium, and has five changeable optics for flexible distribution. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 1 Basis Track is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 178lm at 2.5W from its internal 24V DC driver.

Product Photometry independently tested in accordance with LM-79

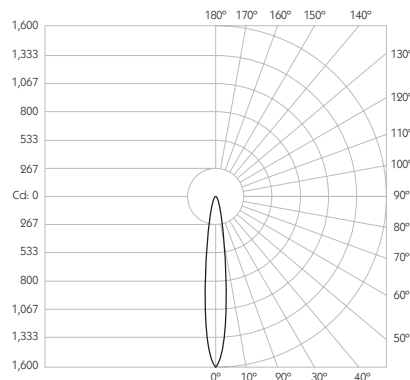


Distance (m)	Beam Diameter (m)	Footcandle (lx)
1m	0.21m	1,566 lx
2m	0.42m	392 lx
3m	0.63m	174 lx
4m	0.84m	98 lx
5m	1.05m	63 lx

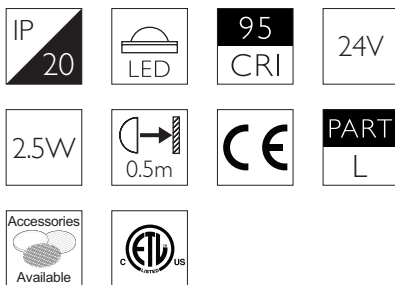

Basis Track

BT-651-AL-309512

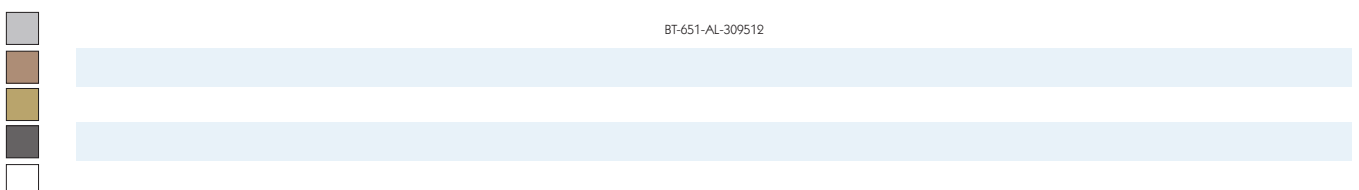

PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK

WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA

t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626

DOMINO 1 BASIS TRACK

luminaires
spec sheet BT-651

FLOOD



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium

System Basis Track

Accessories Lenses

System Power 2.5W

Module Output 178lm

Absolute Output 150lm

LOR 84%

Colour Temperature 3000K*



CRI Ra: 95 **TM-30** Rf: 93 Rg: 99

Optics 30°

Gear Type Dimmable options available


Weight 141g

* Please enquire as to the availability of non-standard colour temperatures.

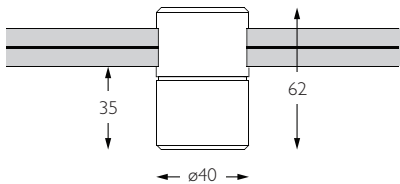


Domino 1 Basis Track is a low profile, track-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in brushed aluminium, and has five changeable optics for flexible distribution. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 1 Basis Track is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 178lm at 2.5W from its internal 24V DC driver.

Product Photometry independently tested in accordance with LM-79

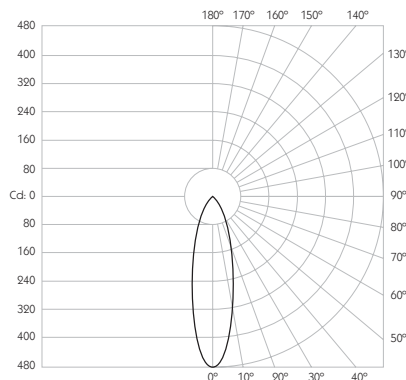


Distance (m)	Beam Diameter (m)	Beam Length (m)	Illuminance (lx)
1m	0.54m	470	470 lx
2m	1.07m	118	118 lx
3m	1.61m	52	52 lx
4m	2.14m	29	29 lx
5m	2.68m	19	19 lx

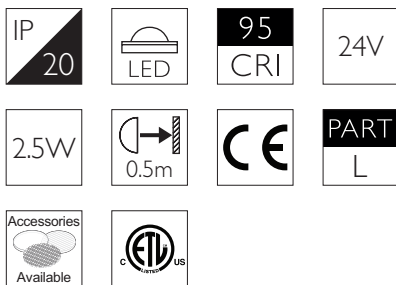

Basis Track

BT-651-AL-309530

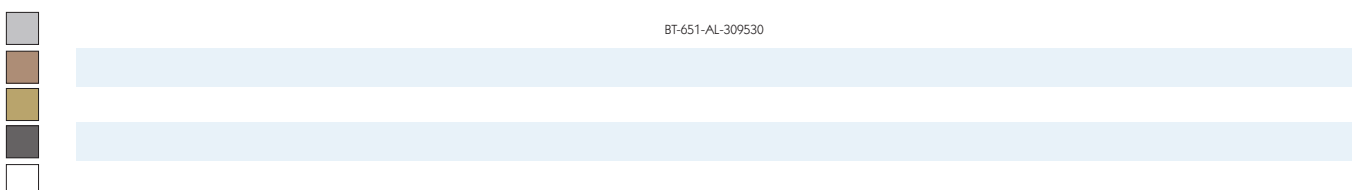

PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK

WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA

t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626

DOMINO 1 BASIS TRACK

luminaires
spec sheet BT-651

WIDE FLOOD



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium

System Basis Track

Accessories Lenses

System Power 2.5W

Module Output 178lm

Absolute Output 163lm

LOR 92%

Colour Temperature 3000K*



CRI Ra: 95 **TM-30** Rf: 93 Rg: 99

Optics 60°

Gear Type Dimmable options available


Weight 141g

* Please enquire as to the availability of non-standard colour temperatures.

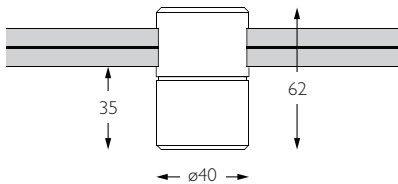


Domino 1 Basis Track is a low profile, track-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in brushed aluminium, and has five changeable optics for flexible distribution. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 1 Basis Track is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 178lm at 2.5W from its internal 24V DC driver.

Product Photometry independently tested in accordance with LM-79

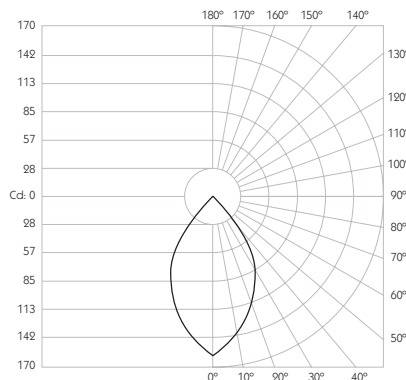


Distance (m)	Beam Diameter (m)	Illuminance (lx)
1m	1.15m	163 lx
2m	2.31m	41 lx
3m	3.46m	18 lx
4m	4.62m	10 lx
5m	5.77m	7 lx

IP 20	LED	95 CRI	24V
2.5W	0.5m	CE	PART L
Accessories Available	ETL US		



Basis Track

BT-651-AL-309560

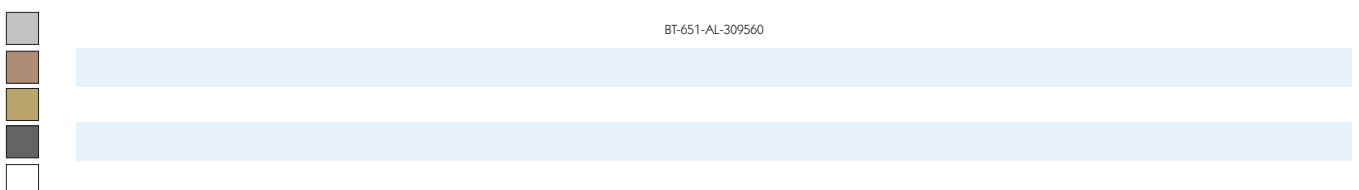

PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK

WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA

t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626

DOMINO 1 BASIS TRACK

luminaires
spec sheet BT-651

ELLIPSE



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium

System Basis Track

Accessories Lenses

System Power 2.5W

Module Output 178lm

Absolute Output 163lm

LOR 92%

Colour Temperature 3000K*



CRI Ra: 95 **TM-30** Rf: 93 Rg: 99

Optics 12X35°

Gear Type Dimmable options available


Weight 141g

* Please enquire as to the availability of non-standard colour temperatures.

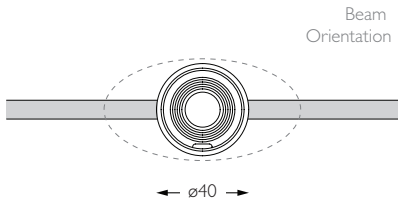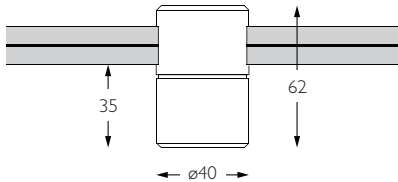

Domino 1 Basis Track is a low profile, track-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in brushed aluminium, and has five changeable optics for flexible distribution. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 1 Basis Track is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 178lm at 2.5W from its internal 24V DC driver.

Product Photometry independently tested in accordance with LM-79

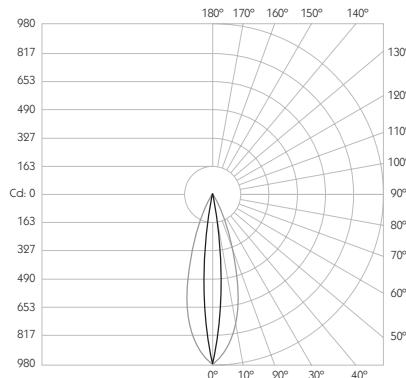

Distance (m)	Beam Width (m)	Beam Diameter (m)	Illuminance (lx)
1m	0.63m	0.21m	972 lx
2m	1.26m	0.42m	243 lx
3m	1.89m	0.63m	108 lx
4m	2.52m	0.84m	60 lx
5m	3.15m	1.05m	39 lx

- IP 20
- LED
- 95 CRI
- 24V
- 2.5W
- 0.5m
- CE
- PART L
- Accessories Available
- ETL US



Basis Track

BT-651-AL-3095E1



PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK

WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA

t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626

DOMINO 1 BASIS TRACK

Luminaires
spec sheet BT-651

VERTICAL ELLIPSE



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium

System Basis Track

Accessories Lenses

System Power 2.5W

Module Output 178lm

Absolute Output 163lm

LOR 92%

Colour Temperature 3000K*



CRI Ra: 95 **TM-30** Rf: 93 Rg: 99

Optics 35X12°

Gear Type Dimmable options available


Weight 141g

* Please enquire as to the availability of non-standard colour temperatures.

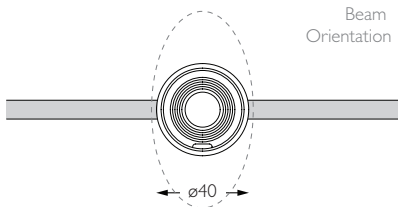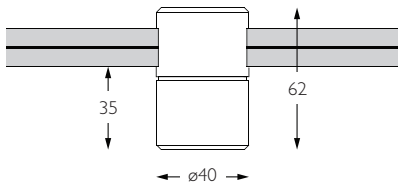


Domino 1 Basis Track is a low profile, track-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in brushed aluminium, and has five changeable optics for flexible distribution. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 1 Basis Track is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 178lm at 2.5W from its internal 24V DC driver.

Product Photometry independently tested in accordance with LM-79

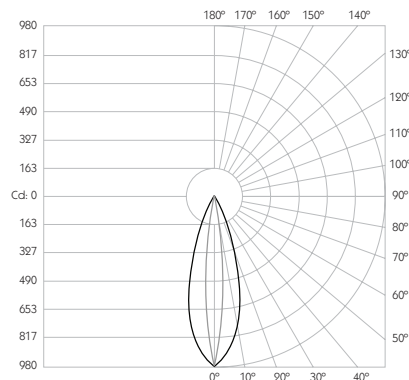


Distance (m)	Beam Width (m)	Beam Depth (m)	Footcandle (lx)
1m	0.63m	0.21m	979 lx
2m	1.26m	0.42m	243 lx
3m	1.89m	0.63m	108 lx
4m	2.52m	0.84m	60 lx
5m	3.15m	1.05m	39 lx

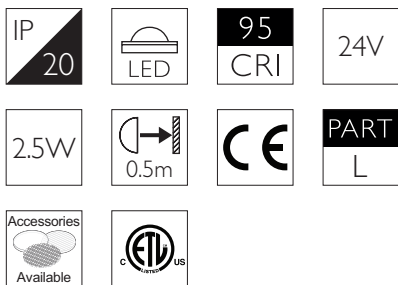

Basis Track

BT-651-AL-3095E2

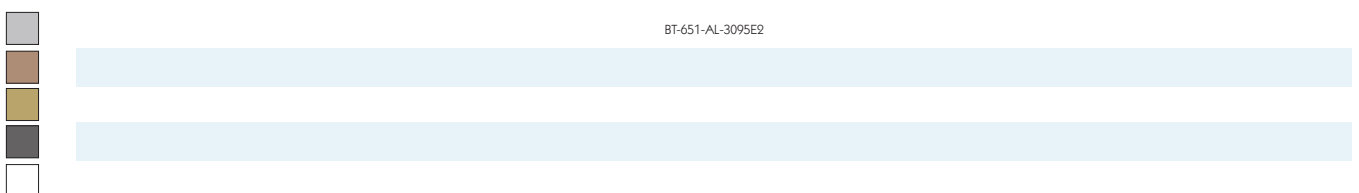

PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK

WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA

t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626

Version 11.17