




HARVARD 700mA 14W DRIVER

LED power supplies
spec sheet PSCC-14-700-D-HA

DALI

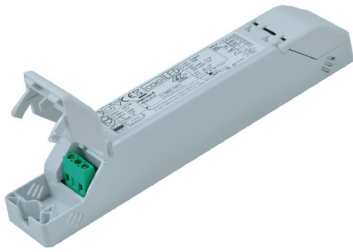

Category IP40
Input Voltage 220-230V AC
Mains Frequency 50/60Hz
Output Current 700ma
Output Power 14W
Dimming DALI
Weight 130g
Finish White
Max Distance ECG-Luminaire 10m
Compatibility Domino [651, 652 and 654]
Luminaire Wiring Series circuit
Order Code PSCC-14-700-D-HA

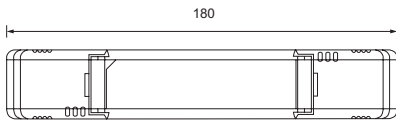

The Harvard LED driver is suitable for use with our constant current Domino Surface and Recessed luminaires. It is for use with the luminaires wired in series. The driver has protection against overheating, open and short circuit, voltage spikes and surge protection. This power supply is dimmable with a DALI control signal.



Luminaire



Domino 4



Domino 2



Domino 1

Qty. Connected
Luminaires

1

2-3

3-6

* Applies to Domino Recessed and Surface only. For Domino Basis Track variations, please refer to constant voltage driver datasheets.

PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA
t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626

Version 11.15