


HARVARD 700mA 33W DRIVER

LED power supplies
spec sheet PSCC-33-700-A-HA

1-10V

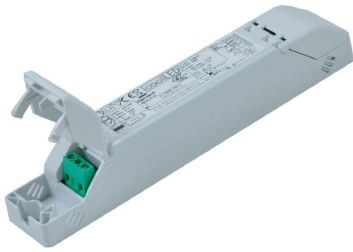

Category IP20

Input Voltage 220-240V AC

Mains Frequency 50/60Hz

Output Current 700ma

Output Power 33W

Dimming 1-10V

Weight 130g



Finish White

Max Distance ECG-Luminaire 10m

Compatibility Domino [651, 652, 654] Surface and Recessed

Luminaire Wiring Series circuit

Order Code PSCC-33-700-A-HA

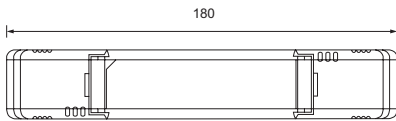

The Harvard LED driver is suitable for use with our 700mA constant current LED luminaires including Domino Surface and Recessed. It is for use with the luminaires wired in series. The driver has protection against overheating, open and short circuit, voltage spikes and surge protection. This power supply is dimmable with a 1-10V control signal.



Luminaire



Domino 4



Domino 2



Domino 1

Min and Max.
Luminaires

1 - 3

2 - 7

4 - 15

* Applies to Domino Recessed and Surface only. For Domino Basis Track variations, please refer to constant voltage driver datasheets.

PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK

WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA

t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626

Version 10.16