

# MINIJOLLY 700mA 20W DRIVER

LED power supplies  
spec sheet PSCC-20-700-D-TC

DALI



**Category** IP20

**Input Voltage** 220-240V AC | 110-127V<sup>1</sup>

**Mains Frequency** 50/60Hz

**Output Current** 700ma

**Output Power** 20W | 15W<sup>1</sup>

**Dimming** DALI

**Weight** 108g

**Finish** White



**Max Distance** ECG-Luminaire 10m

**Compatibility** Domino [651, 652, 654] Surface and Recessed | Minimo 16


**Luminaire Wiring** Series circuit

**Order Code** PSCC-20-700-D-TC

<sup>1</sup> At Input Voltage Rating of 110-127V, Output Power is 15W

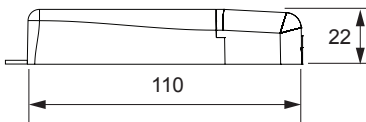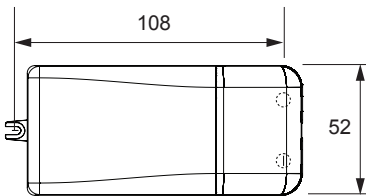

The TCI MiniJolly Dali 20 Driver is suitable for use with our 700mA constant current Domino Surface and Recessed luminaires and Minimo 16. It is for use with the luminaires wired in series. The driver has protection against overheating, short circuit, voltage spikes and overload. This power supply is dimmable with a DALI control signal.



Luminaire	Domino 4*	Domino 2*	Domino 1*	Minimo 16
Max. Connected Luminaires <sup>1</sup>	1	3	6	1

\* Applies to Domino Recessed and Surface only. For Domino Basis Track variations, please refer to constant voltage driver datasheets.

<sup>1</sup> Quantities correct for input voltage rating of 220-240V. At input voltage rating of 110-127V, please enquire for quantity of connected luminaires

PRECISION  
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK  
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD  
LONDON SW17 0BA  
t. +44 (0) 20 8947 6616  
f. +44 (0) 20 8286 6626

Version 01.17