



DOMINO 2 SURFACE

NARROW SPOT




- Category** Interior use only IP20
- Material** Machined Aluminium
- Finish** Brushed Aluminium | Black | White | Custom
- Cutout** ø17mm
- Min. Ceiling Thickness** 5mm
- Accessories** Lenses
- System Power** 4.4W
- Module Output** 356lm
- Absolute Output** 329lm
- LOR** 93%
- Colour Temperature** 3000K*
- CRI** Ra: 95 **TM-30** Rf: 93 Rg: 99
- Optics** 12°
- Gear Type** Dimmable options available
- Weight** 101g

* Please enquire as to the availability of non-standard colour temperatures.

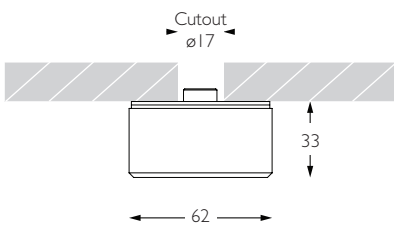


Domino 2 Surface is a low profile, surface-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in white, black and brushed aluminium finishes, and has five changeable optics for flexible distribution. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 2 Surface is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 356lm at 4.4W.

Product Photometry independently tested in accordance with LM-79

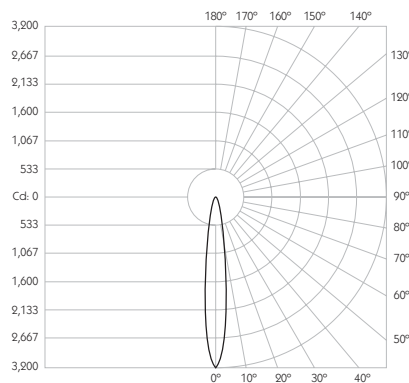

Distance	Beam Diameter	Illuminance (lx)
1m	0.21m	3,140 lx
2m	0.42m	785 lx
3m	0.63m	350 lx
4m	0.84m	196 lx
5m	1.05m	125 lx



Surface

TZ-652-AL-309512

TZ-652-BK-309512

TZ-652-WH-309512



PRECISION LIGHTING

SALES@PRECISIONLIGHTING.CO.UK
WWW.PRECISIONLIGHTING.CO.UK



42 RIVERSIDE ROAD
LONDON SW17 0BA
t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626

FLOOD




- Category** Interior use only IP20
- Material** Machined Aluminium
- Finish** Brushed Aluminium | Black | White | Custom
- Cutout** ø17mm
- Min. Ceiling Thickness** 5mm
- Accessories** Lenses
- System Power** 4.4W
- Module Output** 356lm
- Absolute Output** 301lm
- LOR** 84%
- Colour Temperature** 3000K*
- CRI** Ra: 95 **TM-30** Rf: 93 Rg: 99
- Optics** 30°
- Gear Type** Dimmable options available
- Weight** 101g

* Please enquire as to the availability of non-standard colour temperatures.

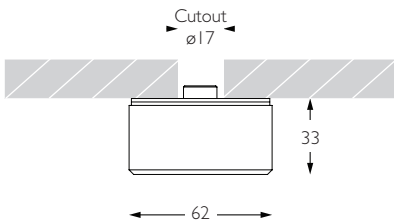

Domino 2 Surface is a low profile, surface-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in white, black and brushed aluminium finishes, and has five changeable optics for flexible distribution. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 2 Surface is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 356lm at 4.4W.

Product Photometry independently tested in accordance with LM-79

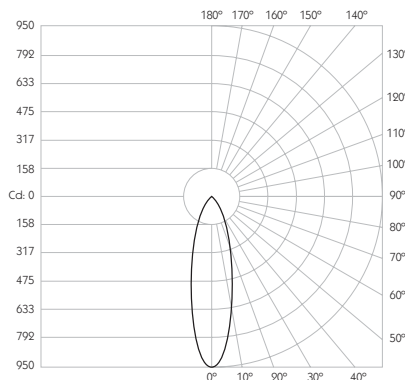

Distance (m)	Beam Diameter (m)	Footcandle (lx)
1m	0.54m	940 lx
2m	1.07m	235 lx
3m	1.61m	105 lx
4m	2.14m	59 lx
5m	2.68m	37 lx

- IP 20
- LED
- 95 CRI
- 700 mA
- 4.4W
- 0.5m
- CE
- PART L
- 17
- Accessories Available



Surface

TZ-652-AL-309530

TZ-652-BK-309530

TZ-652-WH-309530





WIDE FLOOD




- Category** Interior use only IP20
- Material** Machined Aluminium
- Finish** Brushed Aluminium | Black | White | Custom
- Cutout** ø17mm
- Min. Ceiling Thickness** 5mm
- Accessories** Lenses
- System Power** 4.4W
- Module Output** 356lm
- Absolute Output** 327lm
- LOR** 92%
- Colour Temperature** 3000K*
- CRI** Ra: 95 **TM-30** Rf: 93 Rg: 99
- Optics** 60°
- Gear Type** Dimmable options available
- Weight** 101g

* Please enquire as to the availability of non-standard colour temperatures.

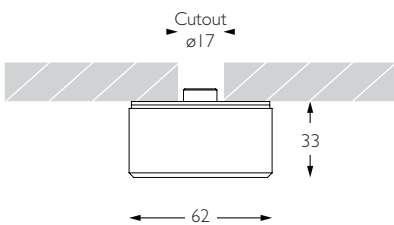

Domino 2 Surface is a low profile, surface-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in white, black and brushed aluminium finishes, and has five changeable optics for flexible distribution. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 2 Surface is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 356lm at 4.4W.

Product Photometry independently tested in accordance with LM-79

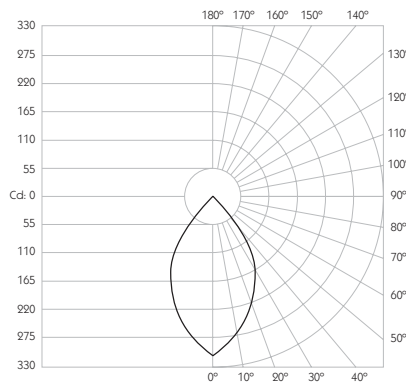

Height (m)	Beam Diameter (m)	Illuminance (lx)
1m	1.15m	327 lx
2m	2.31m	82 lx
3m	3.46m	36 lx
4m	4.62m	20 lx
5m	5.77m	13 lx

- IP 20
- LED
- 95 CRI
- 700 mA
- 4.4W
- 0.5m
- CE
- PART L
- 17
- Accessories Available



Surface

TZ-652-AL-309560

TZ-652-BK-309560

TZ-652-WH-309560





ELLIPSE




- Category** Interior use only IP20
- Material** Machined Aluminium
- Finish** Brushed Aluminium | Black | White | Custom
- Cutout** ø17mm
- Min. Ceiling Thickness** 5mm
- Accessories** Lenses
- System Power** 4.4W
- Module Output** 356lm
- Absolute Output** 327lm
- LOR** 92%
- Colour Temperature** 3000K*
- CRI** Ra: 95 **TM-30** Rf: 93 Rg: 99
- Optics** 12X35°
- Gear Type** Dimmable options available
- Weight** 101g

* Please enquire as to the availability of non-standard colour temperatures.

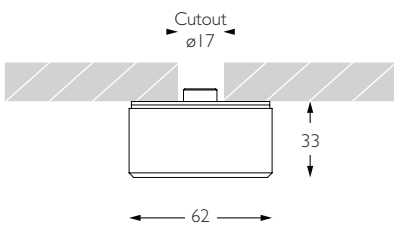

Domino 2 Surface is a low profile, surface-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in white, black and brushed aluminium finishes, and has five changeable optics for flexible distribution. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 2 Surface is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 356lm at 4.4W.

Product Photometry independently tested in accordance with LM-79

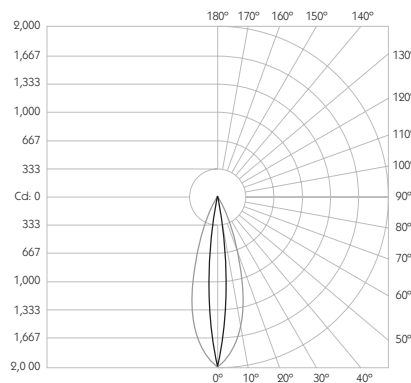

Distance (m)	Beam Width (m)	Beam Height (m)	Footcandle (lx)
1m	0.63m	0.21m	1,950 lx
2m	1.26m	0.42m	487 lx
3m	1.89m	0.63m	216 lx
4m	2.52m	0.84m	121 lx
5m	3.15m	1.05m	78 lx



Surface

TZ-652-AL-3095E1



TZ-652-BK-3095E1

TZ-652-WH-3095E1

**PRECISION
LIGHTING**

SALES@PRECISIONLIGHTING.CO.UK
WWW.PRECISIONLIGHTING.CO.UK



42 RIVERSIDE ROAD
LONDON SW17 0BA
t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626

VERTICAL ELLIPSE




- Category** Interior use only IP20
- Material** Machined Aluminium
- Finish** Brushed Aluminium | Black | White | Custom
- Cutout** ø17mm
- Min. Ceiling Thickness** 5mm
- Accessories** Lenses
- System Power** 4.4W
- Module Output** 356lm
- Absolute Output** 327lm
- LOR** 92%
- Colour Temperature** 3000K*
- CRI** Ra: 95 **TM-30** Rf: 93 Rg: 99
- Optics** 35X12°
- Gear Type** Dimmable options available
- Weight** 101g

* Please enquire as to the availability of non-standard colour temperatures.

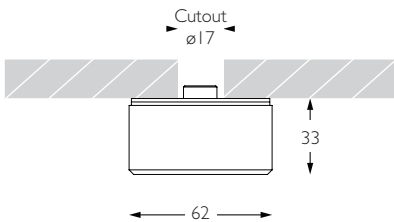

Domino 2 Surface is a low profile, surface-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in white, black and brushed aluminium finishes, and has five changeable optics for flexible distribution. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 2 Surface is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 356lm at 4.4W.

Product Photometry independently tested in accordance with LM-79

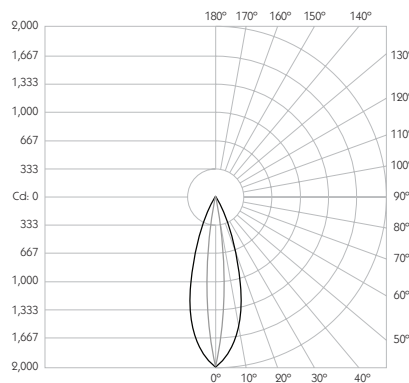

Distance (m)	Beam Diameter (m)	Beam Diameter (m)	Footcandle (lx)
1m	0.63m	0.21m	1,950 lx
2m	1.26m	0.42m	487 lx
3m	1.89m	0.63m	216 lx
4m	2.52m	0.84m	121 lx
5m	3.15m	1.05m	78 lx



Surface

TZ-652-AL-3095E2

TZ-652-BK-3095E2

TZ-652-WH-3095E2

