


## VARIABLE BEAM SPOT LONG SNOOT

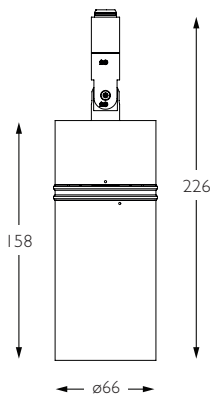

### Technical Description

Evo Zoom is a single source LED spotlight that comes as standard in white, black and brushed aluminium finishes. It has a lockable dual lens zoom for flexible beam distribution. The narrow spot beam in our 9W 700lm module has a peak intensity of 11313cd. The Evo has a 360 degree bearing aided rotation and 180 degree constant torque tilt mechanism, both lockable. The Jack Plug system enables the luminaire to be easily disconnected and reconnected to all of Precision Lighting's systems. The onboard 24V driver ensures overcurrent protection and is not polarity sensitive.

### Mechanical

**Category** Interior use only IP20

**Material** Machined Aluminium

**Lockable** Pan & Tilt

**Accessories** Snoots | Louvres | Lenses

**Systems** Eutrac | Monopoint | LV tracks

**Weight** 460g

### Finishes

**Finishes** Brushed Aluminium | Black | White | Custom\*

\* Please enquire as to the availability of non-standard Finishes

### Optical & Electrical

**System Power** 9W

**Module Output** 700lm\*

**Gear Type** Dimmable available

**Colour Temperature** 3000K\*

**CRI** 92 TYP

**TM-30** RF: 90 RG: 99

**Beam Angle** 09° to 30°

**Driver/PSU Code** **QTY** **Lights** **Input**

————— 1-10V Dimming —————

PSCV-20-24-A-TC 1 230V

PSCV-15-24-A-TC 1 110/127V




PSCV-120-24-A-OS 1 to 10 230V

————— DALI Dimming —————

PSCV-16-24-D-TC 1 230V

PSCV-15-24-D-TC 1 110/127V

PSCV-100-24-D-EL 1 to 10 120/230V

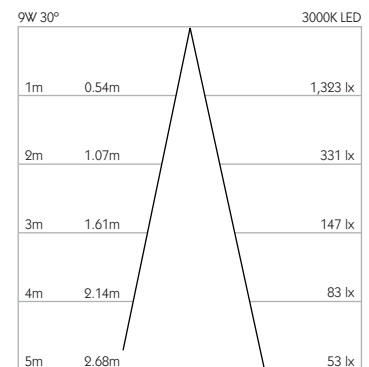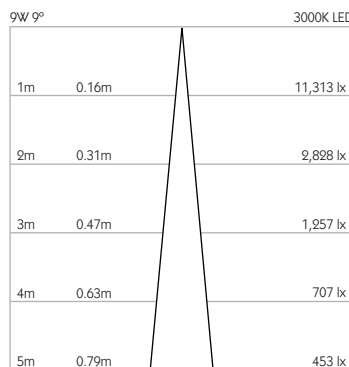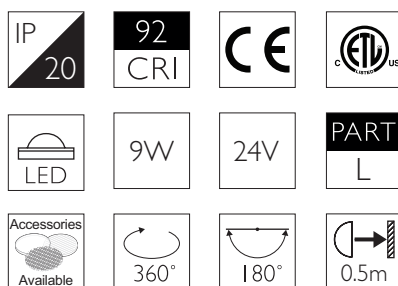

Product Photometry tested in accordance with LM-79 at 3000K, please enquire for 2700K data.

Finish	Cable	Basis Track	Retrac	Eutrac	Trimless	Flat	Node	Surface
AL		BT-592-AL-XX92ZO	RT-592-AL-XX92ZO	EUT4-592-AL-XX92ZO	MPS-592-AL-XX92ZO	MPX-592-AL-XX92ZO	MPY-592-AL-XX92ZO	MPZ-592-AL-XX92ZO
WH			RT-592-WH-XX92ZO	EUT4-592-WH-XX92ZO	MPS-592-WH-XX92ZO	MPX-592-WH-XX92ZO	MPY-592-WH-XX92ZO	MPZ-592-WH-XX92ZO
BK			RT-592-BK-XX92ZO		MPS-592-BK-XX92ZO	MPX-592-BK-XX92ZO	MPY-592-BK-XX92ZO	MPZ-592-BK-XX92ZO
RB	*							

For 3000K Substitute XX with 30

For 2700K Substitute XX with 27

\*All Brass and Bronze finishes are made to order and subject to MOQ