


VARIABLE BEAM




Category Interior use only IP20
Material Machined Aluminium
Finish Brushed Aluminium | Black | White | Custom
System Monopoint | LV tracks
Lockable Pan & Tilt
System Power 1.9W
Module Output 140lm
Absolute Output 130lm
LOR 92%
Colour Temperature 3000K | 2700K | *
CRI Ra: 95 **TM-30** Rf: 93 Rg: 99
Optics 12° to 30°
Gear Type Dimmable options available
Weight 115g
Stem Length 360mm | Custom available upon request
 * Please enquire as to the availability of non-standard Colour Temperatures.

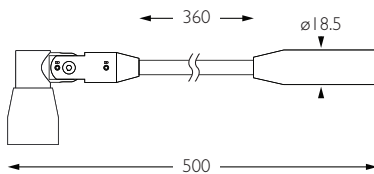


Pico S1 Zoom is a discreet 95CRI LED spotlight, based on the minimal aesthetic of the Pico S1, but with the additional benefit of tool-less variable beam technology. The spotlight comes as standard in white, black and brushed aluminium finishes mounted to a 360mm stem. Movement is aided by a low friction bearing rotation and constant torque tilt mechanism, lockable in both pan and tilt. The Precision Lighting Jack Plug system enables the luminaire to be easily disconnected and reconnected to all of Precision Lighting's systems, offering flexibility throughout the product's lifetime. The onboard 24V driver ensures overcurrent protection and is not polarity sensitive. Pico S1 Zoom is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 140lm at 1.9W.

Product Photometry independently tested in accordance with LM-79

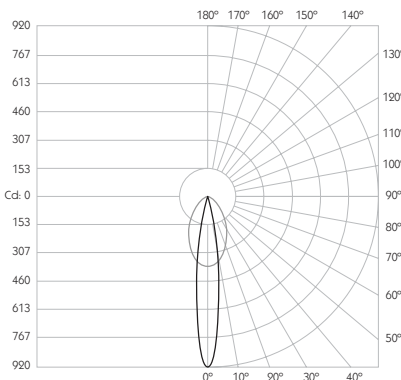

1.9W 12° 30°			3000K LED	
1m	0.54m	0.21m	911 lx	335 lx
2m	1.07m	0.42m	228 lx	84 lx
3m	1.61m	0.63m	101 lx	37 lx
4m	2.14m	0.84m	57 lx	21 lx
5m	2.68m	1.05m	36 lx	13 lx

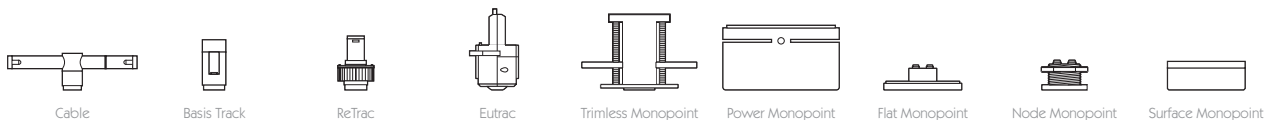

	BT-707-AL-XX9512	RT-707-AL-XX9512	MPS-707-AL-XX9512	MPX-707-AL-XX9512	MPY-707-AL-XX9512	MPZ-707-AL-XX9512
		RT-707-BK-XX9512	MPS-707-BK-XX9512	MPX-707-BK-XX9512	MPY-707-BK-XX9512	MPZ-707-BK-XX9512
	RT-707-WH-XX9512		MPS-707-WH-XX9512	MPX-707-WH-XX9512	MPY-707-WH-XX9512	MPZ-707-WH-XX9512

For 3000K Substitute XX with 30 | For 2700K Substitute XX with 27