



Category Interior use only IP20

Material Mild Steel

Finish White


Type Toroidal

Voltage 12V AC


Weight 3.0kg - 5.7kg

Compatibility Basis Track I Cable System I ReTrac I Monopoints

Dimmable Yes

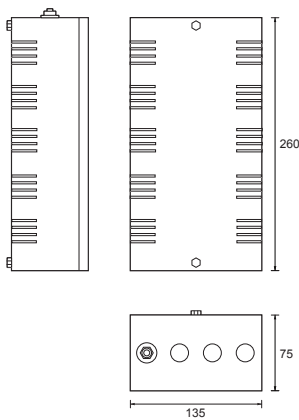

PS200T - 200W | PS300T - 300W

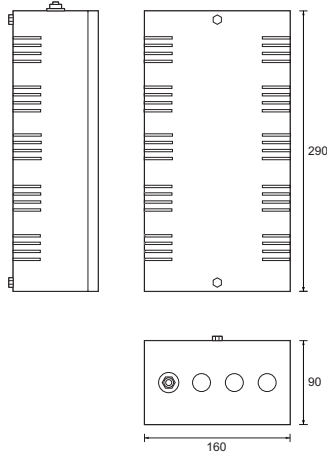

PS400T - 400W | PS500T - 500W


We recommend using a toroidal transformer for all our track and cable systems. They are intended for installation in a remote location where possible. Runs of power feed cable should be kept as short as possible to minimise unnecessary voltage drop. All our transformers have short circuit and thermal protection with either automatic or manual reset functions. These transformers are dimmable with a dimmer suitable for inductive loads.

Notes

For Mode transformers please see spec sheet PS-M.

For Relco transformers please see spec sheet PS-E-R.



TOROIDAL	POWER OUTPUT (VA)	VOLTAGE INPUT (V)	VOLTAGE OUTPUT (V)	FREQUENCY (Hz)	AMBIENT TEMP. (°C max)	CASE TEMP. (°C max)	WEIGHT (KG)	COLOUR	ORDER CODE
	200	240	12	50	30	NA	3.00	WHITE	PS200T
	300	240	12	50	30	NA	3.65	WHITE	PS300T
	400	240	12	50	30	NA	5.60	WHITE	PS400T
	500	240	12	50	30	NA	5.70	WHITE	PS500T