




# HARVARD 500mA 24W DRIVER

LED power supplies  
spec sheet PSCC-24-500-D-HA

DALI

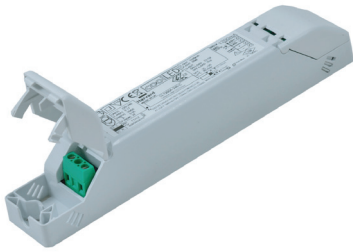

**Category** IP40  
**Input Voltage** 220-240V AC  
**Mains Frequency** 50/60Hz  
**Output Current** 500ma  
**Output Power** 24W  
**Dimming** DALI  
**Weight** 120g  
**Finish** White  
**Max Distance** ECG-Luminaire 10m  
**Compatibility** Pico Surface [MPN-701] | Minimo [601, 602, 611, 621]  
**Luminaire Wiring** Series circuit  
**Order Code** PSCC-24-500-D-HA

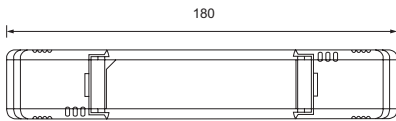

The Harvard LED driver is suitable for use with our constant current LED luminaires, Pico Surface and Minimo. It is for use with the luminaires wired in series. The driver has protection against overheating, open and short circuit, voltage spikes and surge protection. This power supply is dimmable with a DALI control signal.



Luminaire



Pico Surface



Minimo

Qty. Connected  
Luminaires

6-14

6-14

PRECISION  
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK  
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD  
LONDON SW17 0BA  
t. +44 (0) 20 8947 6616  
f. +44 (0) 20 8286 6626

Version 11.15