




Category Interior use only IP20
Material Machined Aluminium | Machined Brass
Finish Brushed Aluminium | Rubbed Bronze
System Cable System | Basis Track | ReTrac | Eutrac | Monopoint
Lamp MR16 [QR-CBC 51]
Rating 50W Max at 12V
Arm Length 400mm [can be cut to length]
Lockable Pan & Tilt
Gear Type Remote
Accessories Snoots | Louvres | Lenses
Weight AL - 60g | RB - 140g

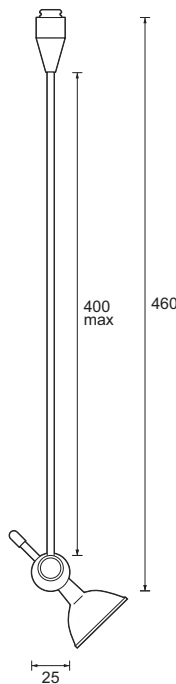

Rotor XL is a long-armed version of the standard Rotor, designed primarily to be used in conjunction with wall mounted ReTrac, Basis Track, and Monopoint systems. Gold plated sprung sockets for the lamp pins provide excellent electrical connection, and the innovative lockable design allows for full adjustability. Machined from aluminium or brass, Rotor XL is available with arm lengths of up to 400mm long in brushed aluminium and rubbed bronze finishes.

The jack plug system allows the luminaires to be easily removed for cleaning or relamping. The luminaires click into the jack plug socket, the threaded jacket then screws into position to lock the connection in place. Once fixed, the luminaires are free to rotate or alternatively, can be secured in place using two locking pins.



IP 20	12V	50W MAX	0.5M	CE	270°	360°	GU5.3	Accessories Available
-------	-----	---------	------	----	------	------	-------	-----------------------

CA4	BT	RT	EUT3	MPS	MPT	MPX	MPY	MPZ
CA4-138-AL-400	BT-138-AL-400	RT-138-AL-400	EUT3-138-AL-400	MPS-138-AL-400	MPT-138-AL-400	MPX-138-AL-400	MPY-138-AL-400	MPZ-138-AL-400
	BT-138-RB-400			MPS-138-RB-400	MPT-138-RB-400	MPX-138-RB-400	MPY-138-RB-400	MPZ-138-RB-400

Notes
 For Rotor XL snoots & accessory holders please see spec sheet 940.
 For Rotor XL accessories please see spec sheet 900.
 For standard Rotor please see spec sheet 138.