



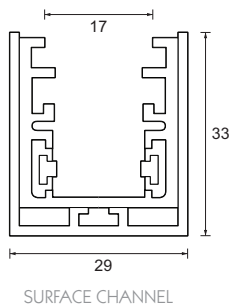

Category Interior use only IP20
Material Extruded Aluminium
Finish Brushed Aluminium | Black [RAL 9005] | White [RAL 9010]
System Jack Plug Connector
Rating 300W Max at 12V
Standard Length 2m lengths [can be cut on site]
Weight AL | BK | WH - 1.2kg/m

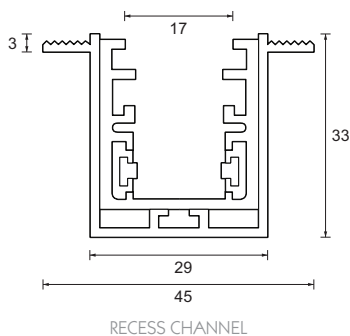


ReTrac is a new low voltage lighting system. Rated at 300W, ReTrac is designed to be recessed into the wall or ceiling, providing an extremely versatile system for picture lighting. The outer extrusion is installed during first fix, with the rest of the system slotting into place after the decoration is complete. The system can also be surface mounted or suspended, and is available with our wide range of luminaires. A picture support is also available. Standard finishes are brushed aluminium, black and white. The optional cover strip can also be painted in to provide a very discreet installation.


The jack plug system allows the luminaires to be easily removed for cleaning or relamping. The luminaires click into the jack plug socket, the threaded jacket then screws into position to lock the connection in place. Once fixed, the luminaires are free to rotate or alternatively, can be secured in place using two locking pins.



	EVO	EVO R	EVO S	RETRO	MICROSPOT C	MICROSPOT S	MICROSPOT L	RADAR	ROTOR	DEMILUMEN	MAXILUMEN
Grey	•	•	•	•	•	•	•	•	•	•	•
Black	•	•	•	•	•	•	•	•	•	•	•
White	•	•	•	•	•	•	•	•	•	•	•

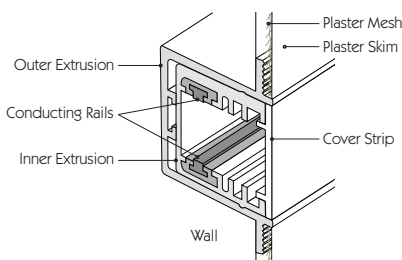


Notes

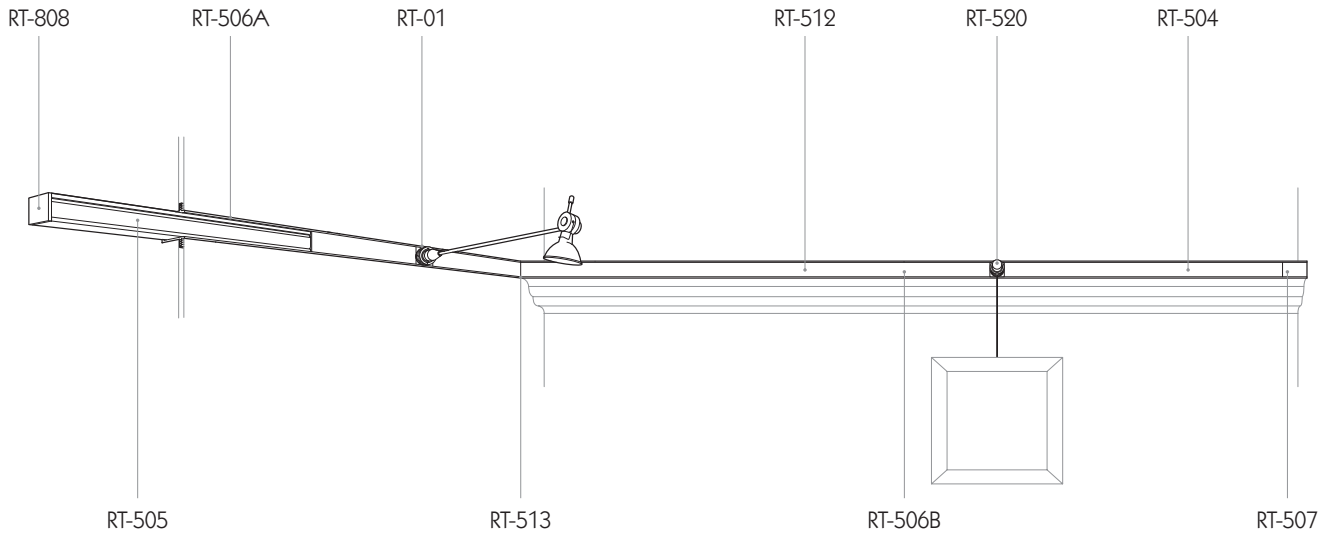


RT Connector

Adaptor for connecting luminaires to the track.

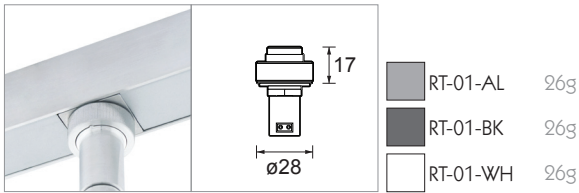


Inner Track

Fits inside either the Recess or Surface Channels.

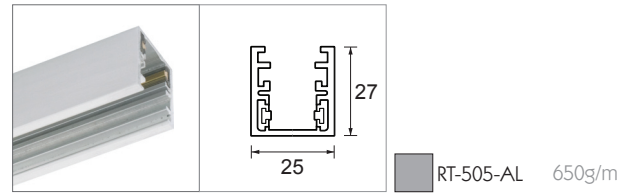


Recess Channel

For use when plastering into a wall providing a seamless joint.

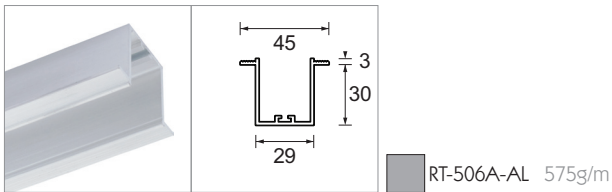


Surface Channel

For use when surface mounting or suspending.

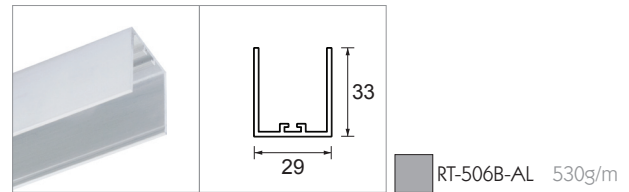


End Cap

Fits onto the end of the track providing a decorative flush end.

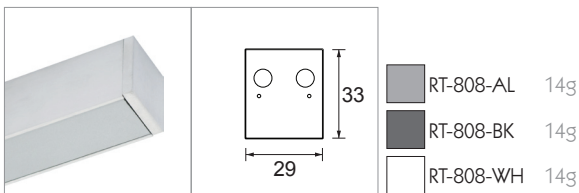


Cover Strip

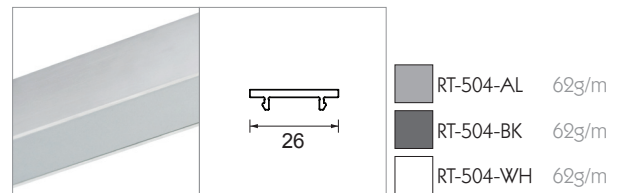


Fits into both Surface and Recess Channels to provide a decorative finish.



Straight Coupler

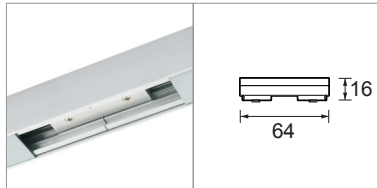
Electronically connects two inline track sections.






	RT-512-AL	38g
	RT-512-BK	38g
	RT-512-WH	38g

Adjustable Coupler

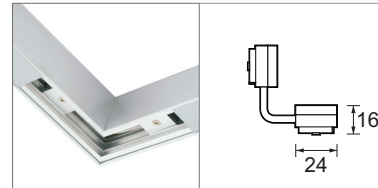
Electronically connects two corner sections of track.






	RT-513-AL	40g
	RT-513-BK	40g
	RT-513-WH	40g

Power Feed

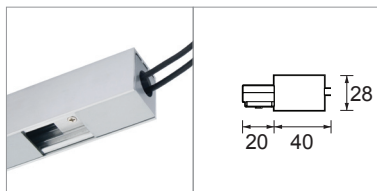Feeds power to the inner track*.







	RT-8507-AL	40g
	RT-507-BK	40g
	RT-507-WH	40g

*can be fed from the side or through a slot at the rear.

Picture Support

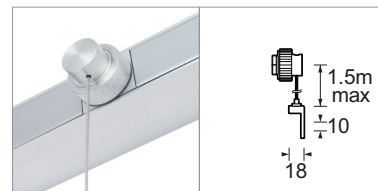Allows a picture to be hung from the track at a chosen height.



	RT-520-AL	48g
	RT-520-BK	48g
	RT-520-WH	48g