

PICO 1 SURFACE

luminaires
spec sheet MPN-731


NARROW SPOT | LONG SNOOT



- Category** Interior use only IP20
- Material** Machined Aluminium
- Finish** Brushed Aluminium | Black | White | Custom
- System** Integral Monopoint
- Lockable** Pan & Tilt
- System Power** 1.6W
- Module Output** 140lm
- Absolute Output** 125lm
- LOR** 89%
- Colour Temperature** 3000K | 2700K | *
- CRI** Ra: 95 **TM-30** Rf: 93 Rg: 99
- Optics** 12°
- Gear Type** Dimmable options available
- Weight** 48g




* Please enquire as to the availability of non-standard Colour Temperatures.

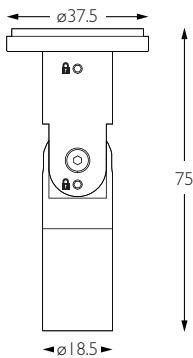


Pico Long Snoot Surface is a discreet, low glare 95CRI LED spotlight, based on a minimal aesthetic and small footprint. The spotlight comes as standard in white, black and brushed aluminium finishes, and has three site changeable optics for flexible distribution. Movement is aided with a low friction bearing rotation and constant torque tilt mechanism, lockable in both pan and tilt. Pico Long Snoot Surface is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 140lm at 1.6W.

Product Photometry independently tested in accordance with LM-79

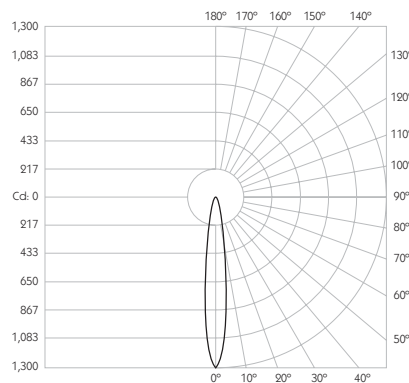

Distance (m)	Beam Diameter (m)	Illuminance (lx)
1m	0.21m	1,920 lx
2m	0.42m	305 lx
3m	0.63m	136 lx
4m	0.84m	76 lx
5m	1.05m	49 lx



Fixed Mounting Plate

MPN-731-AL-XX9512

MPN-731-BK-XX9512

MPN-731-WH-XX9512



For 3000K Substitute XX with 30 | For 2700K Substitute XX with 27

PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA
t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626

PICO 1 SURFACE

luminaires
spec sheet MPN-731


NARROW SPOT | LONG SNOOT



- Category** Interior use only IP20
- Material** Machined Aluminium
- Finish** Brushed Aluminium | Black | White | Custom
- System** Integral Monopoint
- Lockable** Pan & Tilt
- System Power** 1.6W
- Module Output** 140lm
- Absolute Output** 114lm
- LOR** 81%
- Colour Temperature** 3000K | 2700K | *
- CRI** Ra: 95 **TM-30** Rf: 93 Rg: 99
- Optics** 30°
- Gear Type** Dimmable options available
- Weight** 48g




* Please enquire as to the availability of non-standard Colour Temperatures.

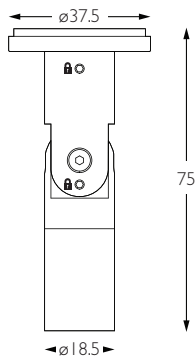


Pico Long Snoot Surface is a discreet, low glare 95CRI LED spotlight, based on a minimal aesthetic and small footprint. The spotlight comes as standard in white, black and brushed aluminium finishes, and has three site changeable optics for flexible distribution. Movement is aided with a low friction bearing rotation and constant torque tilt mechanism, lockable in both pan and tilt. Pico Long Snoot Surface is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 140lm at 1.6W.

Product Photometry independently tested in accordance with LM-79

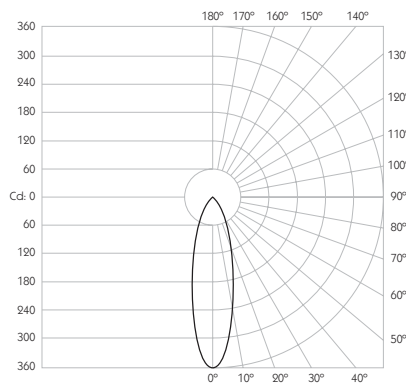

Distance (m)	Beam Diameter (m)	Illuminance (lx)
1m	0.54m	360 lx
2m	1.07m	90 lx
3m	1.61m	40 lx
4m	2.14m	23 lx
5m	2.68m	14 lx



Fixed Mounting Plate

MPN-731-AL-XX9530

MPN-731-BK-XX9530

MPN-731-WH-XX9530



For 3000K Substitute XX with 30 | For 2700K Substitute XX with 27

PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA
t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626

PICO 1 SURFACE

luminaires
spec sheet MPN-731


NARROW SPOT | LONG SNOOT



- Category** Interior use only IP20
- Material** Machined Aluminium
- Finish** Brushed Aluminium | Black | White | Custom
- System** Integral Monopoint
- Lockable** Pan & Tilt
- System Power** 1.6W
- Module Output** 140lm
- Absolute Output** 125lm
- LOR** 89%
- Colour Temperature** 3000K | 2700K | *
- CRI** Ra: 95 **TM-30** Rf: 93 Rg: 99
- Optics** 60°
- Gear Type** Dimmable options available
- Weight** 48g






* Please enquire as to the availability of non-standard Colour Temperatures.

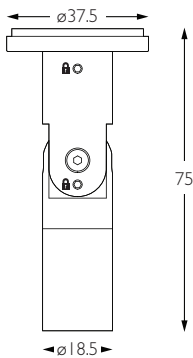

Pico Long Snoot Surface is a discreet, low glare 95CRI LED spotlight, based on a minimal aesthetic and small footprint. The spotlight comes as standard in white, black and brushed aluminium finishes, and has three site changeable optics for flexible distribution. Movement is aided with a low friction bearing rotation and constant torque tilt mechanism, lockable in both pan and tilt. Pico Long Snoot Surface is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 140lm at 1.6W.

Product Photometry independently tested in accordance with LM-79

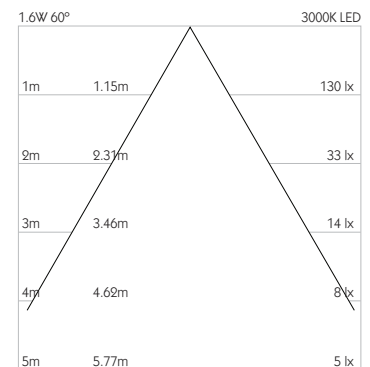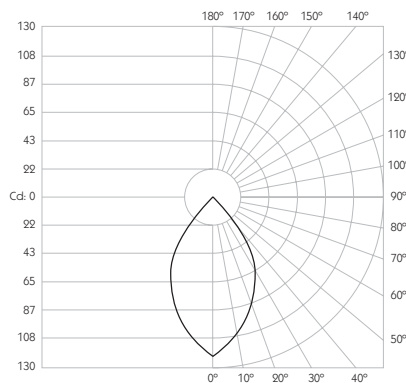



Fixed Mounting Plate

MPN-731-AL-XX9560

MPN-731-BK-XX9560

MPN-731-WH-XX9560



For 3000K Substitute XX with 30 | For 2700K Substitute XX with 27

PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA
t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626