

RELCO 700mA 30W DRIVER

LED power supplies
spec sheet PSCC-30-700-A-RE

1-10V



Category IP20

Input Voltage 220-240V AC

Mains Frequency 50/60Hz

Output Current 700mA

Output Power 30W

Dimming 1-10V

Weight 120g


Finish White

Max Distance ECG-Luminaire 3m

Compatibility Domino [651, 652, 654] Surface and Recessed

Luminaire Wiring Series circuit

Order Code PSCC-30-700-A-RE

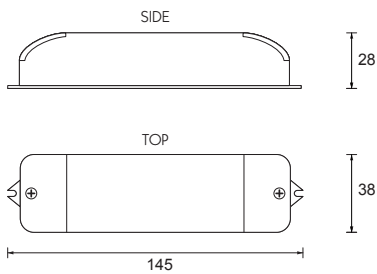

The Relco 30W Driver is suitable for use with our constant current Domino Surface and Recessed luminaires. It is for use with the luminaires wired in series. The driver has thermal protection, short circuit protection and screw down cable clamps. This power supply is dimmable with a 1-10V control signal.



Luminaire	Domino 4	Domino 2	Domino 1
Max. Connected Luminaires	3	6	12

* Applies to Domino Recessed and Surface only. For Domino Basis Track variations, please refer to constant voltage driver datasheets.

PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA
t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626

Version 06.16