

MINIMO FIXED CIRCULAR

luminaires
spec sheet 601

NARROW SPOT



Category Interior use only IP20

Material Machined Aluminium | Machined Brass

Finish Aluminium | Rubbed Bronze | Polished Brass | Black | White | Custom

Cutout ø33mm

Ceiling Thickness 3 - 25mm

Minimum Ceiling Void 20mm above top of luminaire module

System Power 1.6W

Module Output 140lm **Absolute Output** 125lm

LOR 89%

Glare Cut Off 15°

Glare Comfort Cut Off 45°

Colour Temperature 3000K | 2700K | *

CRI Ra: 95 **TM-30** Rf: 93 Rg: 99


Optic 12°

Gear Type Dimmable options available


Gear Location Remote - No access through cutout for dimmable drivers

Weight AL BK WH - 51g | RB PB - 99g

* Please enquire as to the availability of non-standard Colour Temperatures

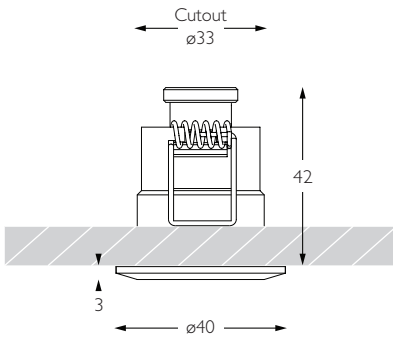

Glare Diagram

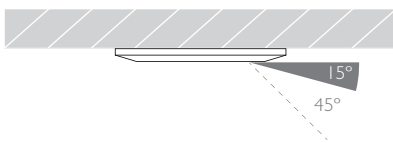



Cut Off: 15°

Glare Comfort Cut Off: 45°

IP 20	95 CRI	CE	ETL US
LED	1.6W	3.2V 500mA	PART L
33	0.5m		

Minimo Fixed Circular is a miniature recessed LED luminaire providing high performance accent lighting from a compact source. With 95CRI, Minimo Fixed is perfect for use in colour-critical applications. Tool-less, site changeable optics allow flexibility in varying environments. Minimo Fixed is machined from aerospace grade 6063-T6 aluminium or brass, is available as standard in white, black, polished brass, rubbed bronze and brushed aluminium finishes, and delivers a lumen package of 140lm at 1.6W.

Product Photometry independently tested in accordance with LM-79

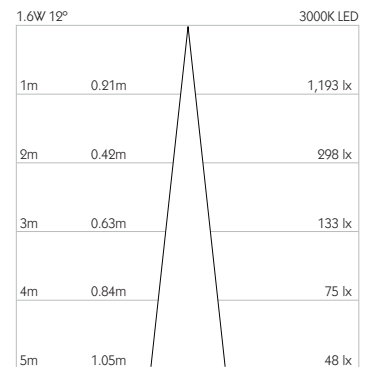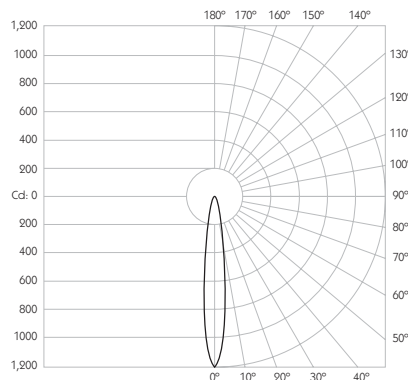

Circular Bezel

RC-601-AL-XX9512	
RC-601-RB-XX9512	
RC-601-PB-XX9512	
RC-601-BK-XX9512	
RC-601-WH-XX9512	

For 3000K Substitute XX with 30 | For 2700K Substitute XX with 27

PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA
t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626

FLOOD



Category Interior use only IP20

Material Machined Aluminium | Machined Brass

Finish Aluminium | Rubbed Bronze | Polished Brass | Black | White | Custom

Cutout ø33mm

Ceiling Thickness 3 - 25mm

Minimum Ceiling Void 20mm above top of luminaire module

System Power 1.6W

Module Output 140lm **Absolute Output** 114lm

LOR 81%

Glare Cut Off 15°

Glare Comfort Cut Off 45°

Colour Temperature 3000K | 2700K | *

CRI Ra: 95 **TM-30** Rf: 93 Rg: 99


Optic 30°

Gear Type Dimmable options available


Gear Location Remote - No access through cutout for dimmable drivers

Weight AL BK WH - 51g | RB PB - 99g

* Please enquire as to the availability of non-standard Colour Temperatures

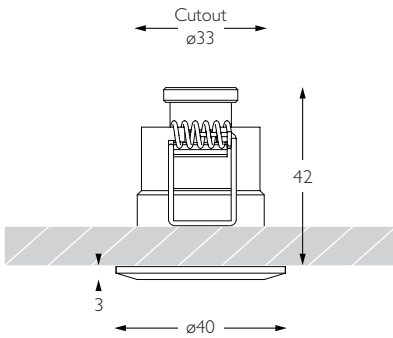

Glare Diagram

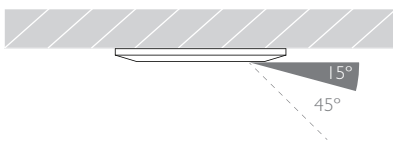



Cut Off: 15°

Glare Comfort Cut Off: 45°

IP 20	95 CRI	CE	ETL US
LED	1.6W	3.2V 500mA	PART L
33	0.5m		

Minimo Fixed Circular is a miniature recessed LED luminaire providing high performance accent lighting from a compact source. With 95CRI, Minimo Fixed is perfect for use in colour-critical applications. Tool-less, site changeable optics allow flexibility in varying environments. Minimo Fixed is machined from aerospace grade 6063-T6 aluminium or brass, is available as standard in white, black, polished brass, rubbed bronze and brushed aluminium finishes, and delivers a lumen package of 140lm at 1.6W.

Product Photometry independently tested in accordance with LM-79

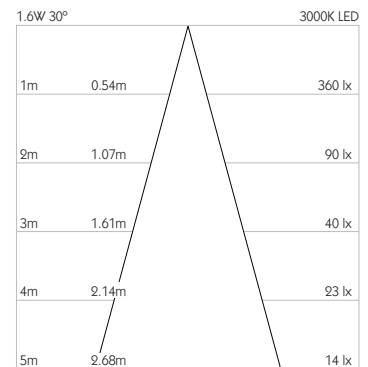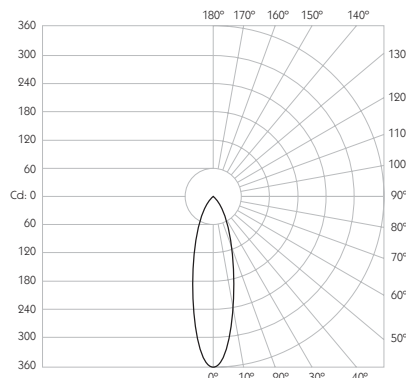

Circular Bezel

RC-601-AL-XX9530	
RC-601-RB-XX9530	
RC-601-PB-XX9530	
RC-601-BK-XX9530	
RC-601-WH-XX9530	

For 3000K Substitute XX with 30 | For 2700K Substitute XX with 27

MINIMO FIXED CIRCULAR

WIDE FLOOD



Category Interior use only IP20

Material Machined Aluminium | Machined Brass

Finish Aluminium | Rubbed Bronze | Polished Brass | Black | White | Custom

Cutout ø33mm

Ceiling Thickness 3 - 25mm

Minimum Ceiling Void 20mm above top of luminaire module

System Power 1.6W

Module Output 140lm **Absolute Output** 125lm

LOR 89%

Glare Cut Off 15°

Glare Comfort Cut Off 45°

Colour Temperature 3000K | 2700K | *

CRI Ra: 95 **TM-30** Rf: 93 Rg: 99


Optic 60°

Gear Type Dimmable options available


Gear Location Remote - No access through cutout for dimmable drivers

Weight AL BK WH - 51g | RB PB - 99g

* Please enquire as to the availability of non-standard Colour Temperatures

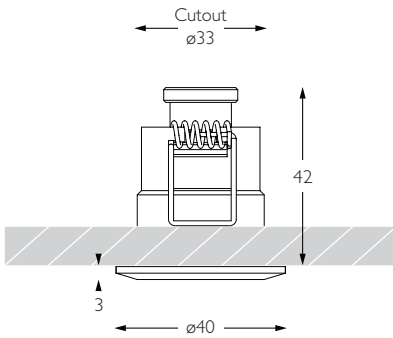

Glare Diagram

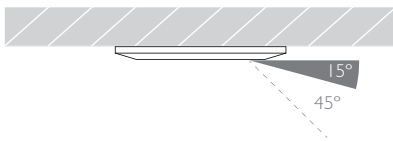


Cut Off: 15°

Glare Comfort Cut Off: 45°


IP 20	95 CRI	CE	ETL US
LED	1.6W	3.2V 500mA	PART L
33	0.5m		

Minimo Fixed Circular is a miniature recessed LED luminaire providing high performance accent lighting from a compact source. With 95CRI, Minimo Fixed is perfect for use in colour-critical applications. Tool-less, site changeable optics allow flexibility in varying environments. Minimo Fixed is machined from aerospace grade 6063-T6 aluminium or brass, is available as standard in white, black, polished brass, rubbed bronze and brushed aluminium finishes, and delivers a lumen package of 140lm at 1.6W.

Product Photometry independently tested in accordance with LM-79

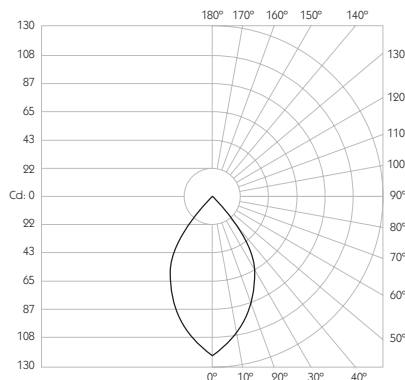

Height	Beam Diameter	Illuminance (lx)
1m	1.15m	125 lx
2m	2.31m	31 lx
3m	3.46m	14 lx
4m	4.62m	8 lx
5m	5.77m	5 lx



Circular Bezel

Grey	RC-601-AL-XX9560
Brown	RC-601-RB-XX9560
Gold	RC-601-PB-XX9560
Black	RC-601-BK-XX9560
White	RC-601-WH-XX9560

For 3000K Substitute XX with 30 | For 2700K Substitute XX with 27