



NARROW SPOT

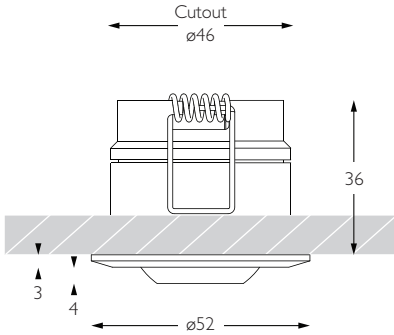

Glare Diagram

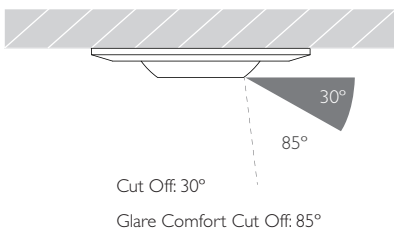


IP 20	95 CRI	CE	ETL US
LED	1.6W	3.2V 500mA	PART L
360°	30°	46	0.5m

Category Interior use only IP20
Material Machined Aluminium
Finish Brushed Aluminium | Black | White | Custom
Cutout ø46mm
Ceiling Thickness 7 - 25mm
Minimum Ceiling Void 20mm spacing above luminaire
Pan 360°
Tilt 30° from centre
System Power 1.6W
Module Output 140lm **Absolute Output** 125lm
LOR 89%
Glare Cut Off 30° in vertical position
Glare Comfort Cut Off 85° in vertical position
Colour Temperature 3000K | 2700K | *
CRI Ra: 95 **TM-30** Rf: 93 Rg: 99
Optic 12°
Gear Type Dimmable options available
Gear Location Remote - No access through cutout for dimmable drivers
Weight 89g

* Please enquire as to the availability of non-standard Colour Temperatures

Minimo Eye is a miniature recessed LED luminaire offering 360° pan coupled with 30° tilt to provide high performance accent lighting. With 95CRI, Minimo Eye is perfect for use in colour-critical applications. Tool-less, site changeable optics allow flexibility in varying environments. Finishing almost flush with the mounting surface, this recessed luminaire comes as standard in white, black and brushed aluminium finishes. Minimo Eye is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 140lm at 1.6W.


Product Photometry independently tested in accordance with LM-79

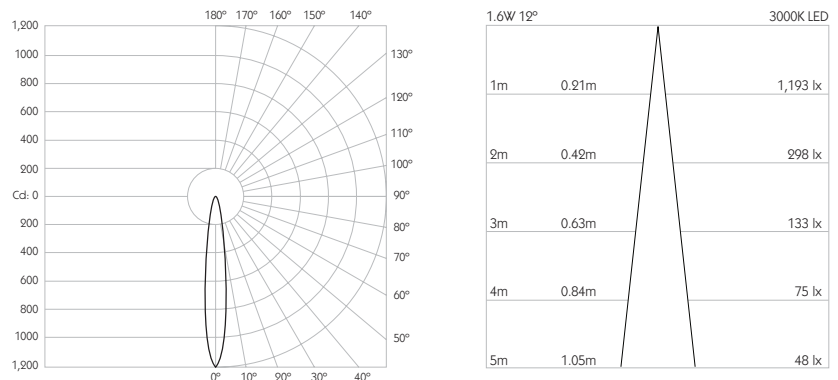


Circular Bezel

	RC-611-AL-XX9512
	RC-611-BK-XX9512
	RC-611-WH-XX9512

FLOOD

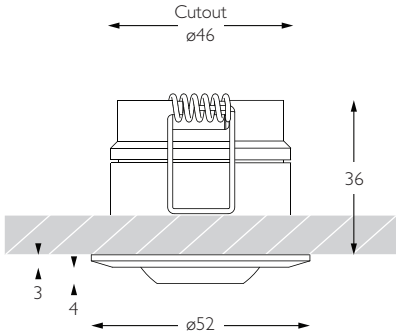

Glare Diagram

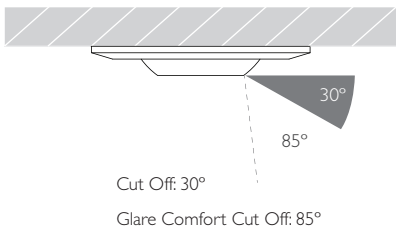



IP 20	95 CRI	CE	ETL US
LED	1.6W	3.2V 500mA	PART L
360°	30°	46	0.5m

Category Interior use only IP20
Material Machined Aluminium
Finish Brushed Aluminium | Black | White | Custom
Cutout ø46mm
Ceiling Thickness 7 - 25mm
Minimum Ceiling Void 20mm spacing above luminaire
Pan 360°
Tilt 30° from centre
System Power 1.6W
Module Output 140lm **Absolute Output** 114lm
LOR 81%
Glare Cut Off 30° in vertical position
Glare Comfort Cut Off 85° in vertical position
Colour Temperature 3000K | 2700K | *
CRI Ra: 95 **TM-30** Rf: 93 Rg: 99
Optic 30°
Gear Type Dimmable options available
Gear Location Remote - No access through cutout for dimmable drivers
Weight 89g

* Please enquire as to the availability of non-standard Colour Temperatures

Minimo Eye is a miniature recessed LED luminaire offering 360° pan coupled with 30° tilt to provide high performance accent lighting. With 95CRI, Minimo Eye is perfect for use in colour-critical applications. Tool-less, site changeable optics allow flexibility in varying environments. Finishing almost flush with the mounting surface, this recessed luminaire comes as standard in white, black and brushed aluminium finishes. Minimo Eye is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 140lm at 1.6W.


Product Photometry independently tested in accordance with LM-79

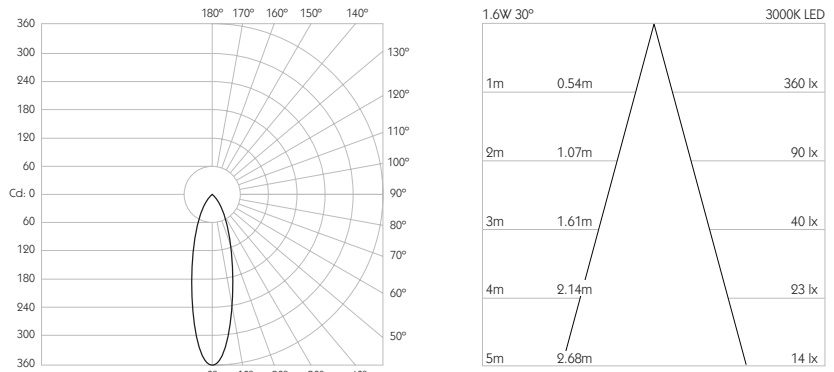

Circular Bezel

	RC-611-AL-XX9530
	RC-611-BK-XX9530
	RC-611-WH-XX9530

WIDE FLOOD

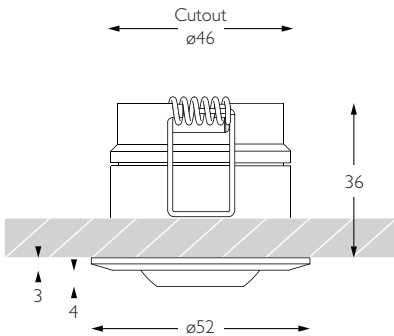


Category Interior use only IP20
Material Machined Aluminium
Finish Brushed Aluminium | Black | White | Custom
Cutout ø46mm
Ceiling Thickness 7 - 25mm
Minimum Ceiling Void 20mm spacing above luminaire
Pan 360°
Tilt 30° from centre
System Power 1.6W
Module Output 140lm **Absolute Output** 125lm
LOR 89%
Glare Cut Off 30° in vertical position
Glare Comfort Cut Off 85° in vertical position
Colour Temperature 3000K | 2700K | *
CRI Ra: 95 **TM-30** Rf: 93 Rg: 99
Optic 60°
Gear Type Dimmable options available
Gear Location Remote - No access through cutout for dimmable drivers
Weight 89g




* Please enquire as to the availability of non-standard Colour Temperatures

Glare Diagram

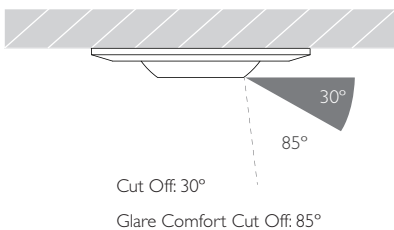

Minimo Eye is a miniature recessed LED luminaire offering 360° pan coupled with 30° tilt to provide high performance accent lighting. With 95CRI, Minimo Eye is perfect for use in colour-critical applications. Tool-less, site changeable optics allow flexibility in varying environments. Finishing almost flush with the mounting surface, this recessed luminaire comes as standard in white, black and brushed aluminium finishes. Minimo Eye is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 140lm at 1.6W.

Product Photometry independently tested in accordance with LM-79

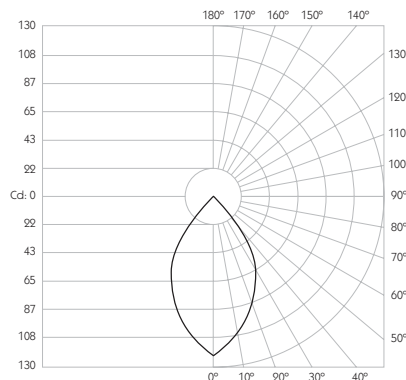

Distance (m)	Beam Diameter (m)	Illuminance (lx)
1m	1.15m	125 lx
2m	2.31m	31 lx
3m	3.46m	14 lx
4m	4.62m	8 lx
5m	5.77m	5 lx

IP 20	95 CRI	CE	ETL US
LED	1.6W	3.2V 500mA	PART L
360°	30°	46	0.5m



Circular Bezel

Grey	RC-611-AL-XX9560
Black	RC-611-BK-XX9560
White	RC-611-WH-XX9560