

PICO ZOOM SURFACE

Luminaires
spec sheet MPN-706


VARIABLE BEAM



- Category** Interior use only IP20
- Material** Machined Aluminium
- Finish** Brushed Aluminium | Black | White | Custom
- System** Integral Monopoint
- Lockable** Pan & Tilt
- System Power** 1.6W
- Module Output** 140lm
- Absolute Output** 130lm
- LOR** 93%
- Colour Temperature** 3000K | 2700K | *
- CRI** Ra: 95 **TM-30** Rf: 93 Rg: 99
- Optics** 12° to 30°
- Gear Type** Dimmable options available
- Weight** 62g




* Please enquire as to the availability of non-standard Colour Temperatures.

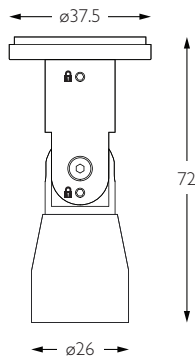


Pico Zoom Surface is a discreet 95CRI LED spotlight, based on the minimal aesthetic of the Pico 1 Surface, but with the additional benefit of tool-less variable beam technology. The spotlight comes as standard in white, black and brushed aluminium finishes, and has a tool-less beam adjustment mechanism. Movement is aided with a low friction bearing rotation and constant torque tilt mechanism, lockable in both pan and tilt. Pico Zoom Surface is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 140lm at 1.6W.


Product Photometry independently tested in accordance with LM-79

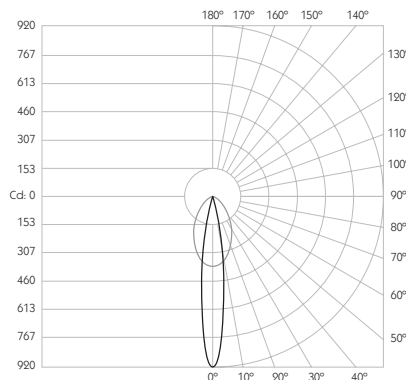

Distance	Beam Diameter	Beam Area	Footcandle (lx)	Footcandle (lx)
1m	0.54m	0.21m	911 lx	335 lx
2m	1.07m	0.42m	228 lx	84 lx
3m	1.61m	0.63m	101 lx	37 lx
4m	2.14m	0.84m	57 lx	21 lx
5m	2.68m	1.05m	36 lx	13 lx



Fixed Mounting Plate



MPN-706-AL-XX9512

MPN-706-BK-XX9512

MPN-706-WH-XX9512

For 3000K Substitute XX with 30 | For 2700K Substitute XX with 27

PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA
t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626