

# OCULUS 16


NARROW SPOT | SHORT SNOOT



- Category** Interior use only IP20
- Material** Machined Aluminium
- Finish** Brushed Aluminium | Black | White | Custom
- System** Eutrac | Monopoint | LV tracks
- Lockable** Pan & Tilt
- Accessories** Snoots | Louvres | Lenses
- System Power** 9.8W
- Module Output** 712lm
- Absolute Output** 678lm
- LOR** 95%
- Colour Temperature** 3000K | 2700K | \*
- CRI** Ra: 95    **TM-30** Rf: 93 Rg: 99
- Optics** 12°
- Gear Type** Dimmable options available
- Weight** 370g






\* Please enquire as to the availability of non-standard Colour Temperatures.

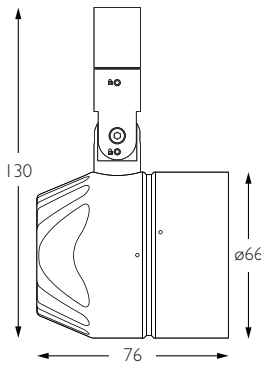

Oculus 16 is a 95CRI LED spotlight, based on a highly efficient heatsink with advanced features and benefits. The spotlight comes as standard in white, black and brushed aluminium finishes, and has three site changeable optics for flexible distribution. Movement is aided with a low friction bearing rotation and constant torque tilt mechanism, both lockable in pan and tilt. The Precision Lighting Jack Plug system enables the luminaire to be easily disconnected and reconnected to all of Precision Lighting's systems, offering flexibility throughout the product's lifetime. The onboard 24V driver ensures overcurrent protection and is not polarity sensitive. Oculus 16 is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 712lm at 9.8W.

Product Photometry independently tested in accordance with LM-79

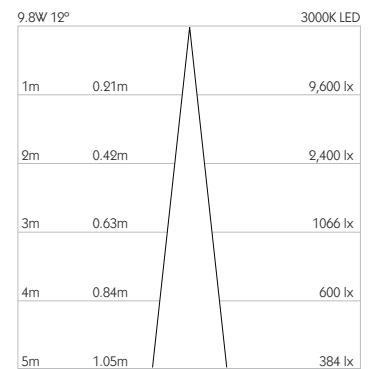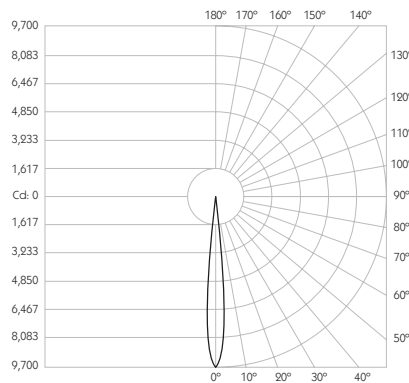

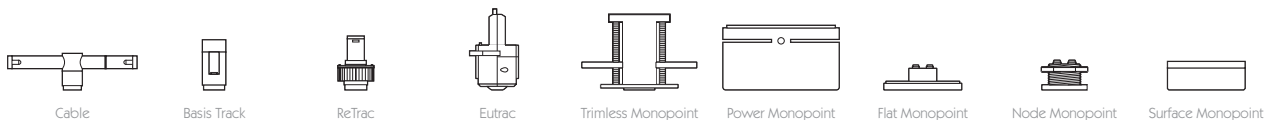



	BT-723-AL-XX9512	RT-723-AL-XX9512	EUT3-723-AL-XX9512	MPS-723-AL-XX9512	MPX-723-AL-XX9512	MPY-723-AL-XX9512	MPZ-723-AL-XX9512
		RT-723-BK-XX9512	EUT3-723-BK-XX9512	MPS-723-BK-XX9512	MPX-723-BK-XX9512	MPY-723-BK-XX9512	MPZ-723-BK-XX9512
	RT-723-WH-XX9512	EUT3-723-WH-XX9512	MPS-723-WH-XX9512	MPX-723-WH-XX9512	MPY-723-WH-XX9512	MPZ-723-WH-XX9512	

For 3000K Substitute XX with 30 | For 2700K Substitute XX with 27






**Category** Interior use only IP20  
**Material** Machined Aluminium  
**Finish** Brushed Aluminium | Black | White | Custom  
**System** Eutrac | Monopoint | LV tracks  
**Lockable** Pan & Tilt  
**Accessories** Snoots | Louvres | Lenses  
**System Power** 9.8W  
**Module Output** 712lm  
**Absolute Output** 678lm  
**LOR** 95%  
**Colour Temperature** 3000K | 2700K | \*  
**CRI** Ra: 95    **TM-30** Rf: 93 Rg: 99  
**Optics** 20°  
**Gear Type** Dimmable options available  
**Weight** 370g

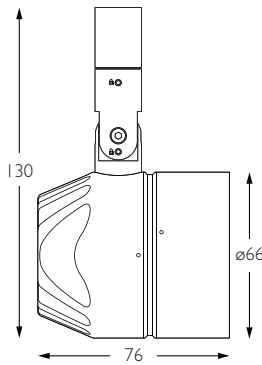

Oculus 16 is a 95CRI LED spotlight, based on a highly efficient heatsink with advanced features and benefits. The spotlight comes as standard in white, black and brushed aluminium finishes, and has three site changeable optics for flexible distribution. Movement is aided with a low friction bearing rotation and constant torque tilt mechanism, both lockable in pan and tilt. The Precision Lighting Jack Plug system enables the luminaire to be easily disconnected and reconnected to all of Precision Lighting's systems, offering flexibility throughout the product's lifetime. The onboard 24V driver ensures overcurrent protection and is not polarity sensitive. Oculus 16 is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 712lm at 9.8W.

Product Photometry independently tested in accordance with LM-79

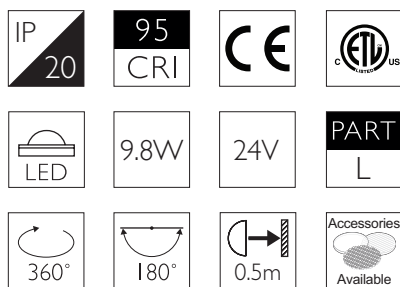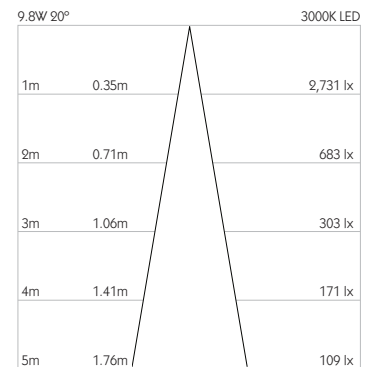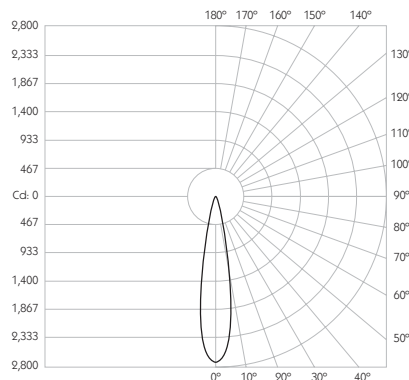

System	Cable	Basis Track	ReTrac	Eutrac	Trimless Monopoint	Power Monopoint	Flat Monopoint	Node Monopoint	Surface Monopoint
Brushed Aluminium		BT-723-AL-XX9520	RT-723-AL-XX9520	EUT3-723-AL-XX9520	MPS-723-AL-XX9520		MPX-723-AL-XX9520	MPY-723-AL-XX9520	MPZ-723-AL-XX9520
Black			RT-723-BK-XX9520	EUT3-723-BK-XX9520	MPS-723-BK-XX9520		MPX-723-BK-XX9520	MPY-723-BK-XX9520	MPZ-723-BK-XX9520
White			RT-723-WH-XX9520	EUT3-723-WH-XX9520	MPS-723-WH-XX9520		MPX-723-WH-XX9520	MPY-723-WH-XX9520	MPZ-723-WH-XX9520


For 3000K Substitute XX with 30 | For 2700K Substitute XX with 27



**Category** Interior use only IP20  
**Material** Machined Aluminium  
**Finish** Brushed Aluminium | Black | White | Custom  
**System** Eutrac | Monopoint | LV tracks  
**Lockable** Pan & Tilt  
**Accessories** Snoots | Louvres | Lenses  
**System Power** 9.8W  
**Module Output** 712lm  
**Absolute Output** 672lm  
**LOR** 94%  
**Colour Temperature** 3000K | 2700K | \*  
**CRI** Ra: 95    **TM-30** Rf: 93 Rg: 99  
**Optics** 40°  
**Gear Type** Dimmable options available  
**Weight** 370g






\* Please enquire as to the availability of non-standard Colour Temperatures.

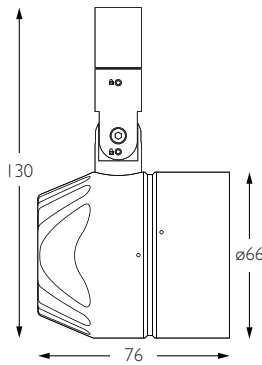

Oculus 16 is a 95CRI LED spotlight, based on a highly efficient heatsink with advanced features and benefits. The spotlight comes as standard in white, black and brushed aluminium finishes, and has three site changeable optics for flexible distribution. Movement is aided with a low friction bearing rotation and constant torque tilt mechanism, both lockable in pan and tilt. The Precision Lighting Jack Plug system enables the luminaire to be easily disconnected and reconnected to all of Precision Lighting's systems, offering flexibility throughout the product's lifetime. The onboard 24V driver ensures overcurrent protection and is not polarity sensitive. Oculus 16 is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 712lm at 9.8W.

Product Photometry independently tested in accordance with LM-79

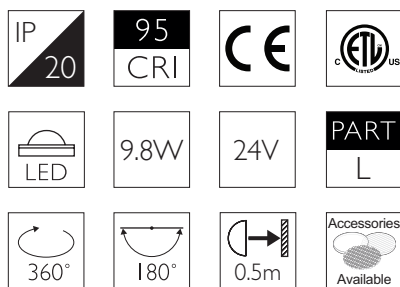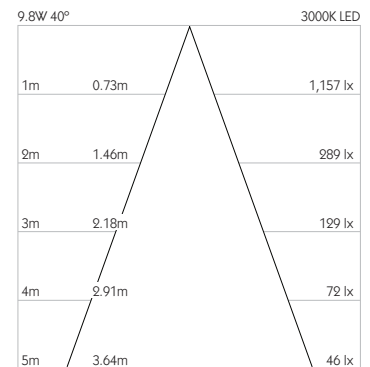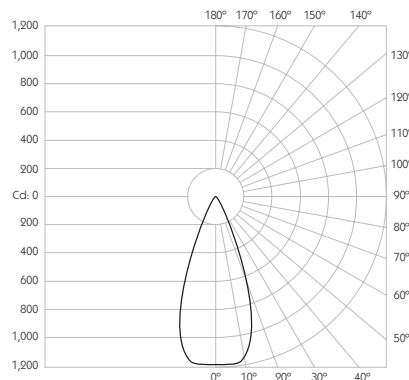

Mounting System	Part Number	Part Number	Part Number	Part Number	Part Number	Part Number	Part Number	Part Number
Cable	BT-723-AL-XX9540	RT-723-AL-XX9540	EUT3-723-AL-XX9540	MPS-723-AL-XX9540	Power Monopoint	MPX-723-AL-XX9540	MPY-723-AL-XX9540	MPZ-723-AL-XX9540
Basis Track								
ReTrac								
Eutrac								
Trimless Monopoint								
Flat Monopoint								
Node Monopoint								
Surface Monopoint								
Color: Grey								
Color: Brown								
Color: Black		RT-723-BK-XX9540	EUT3-723-BK-XX9540	MPS-723-BK-XX9540		MPX-723-BK-XX9540	MPY-723-BK-XX9540	MPZ-723-BK-XX9540
Color: White		RT-723-WH-XX9540	EUT3-723-WH-XX9540	MPS-723-WH-XX9540		MPX-723-WH-XX9540	MPY-723-WH-XX9540	MPZ-723-WH-XX9540

For 3000K Substitute XX with 30 | For 2700K Substitute XX with 27