





- Category** Interior use only IP20
 - Material** Machined Aluminium
 - Finish** Brushed Aluminium | Black | White | Custom
 - System** Monopoint | LV tracks
 - Lockable** Pan & Tilt
 - System Power** 1.9W
 - Module Output** 140lm
 - Absolute Output** 125lm
 - LOR** 89%
 - Colour Temperature** 3000K | 2700K | *
 - CRI** Ra: 95 **TM-30** Rf: 93 Rg: 99
 - Optics** 12°
 - Gear Type** Dimmable options available
 - Weight** 101g
 - Stem Length** 360mm | Custom available upon request
- * Please enquire as to the availability of non-standard Colour Temperatures.

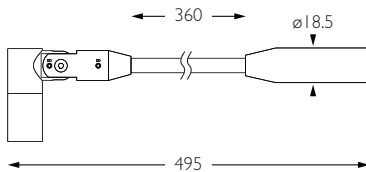

Pico S1 Long Snoot is a discreet, low glare 95CRI LED spotlight, mounted to a 360mm stem. The spotlight comes as standard in white, black and brushed aluminium finishes, and has three site changeable optics for flexible distribution. Movement is aided with a low friction bearing rotation and constant torque tilt mechanism, lockable in both pan and tilt. The Precision Lighting Jack Plug system enables the luminaire to be easily disconnected and reconnected to all of Precision Lighting's systems, offering flexibility throughout the product's lifetime. The onboard 24V driver ensures overcurrent protection and is not polarity sensitive. Pico S1 is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 125lm at 1.9W.

Product Photometry independently tested in accordance with LM-79

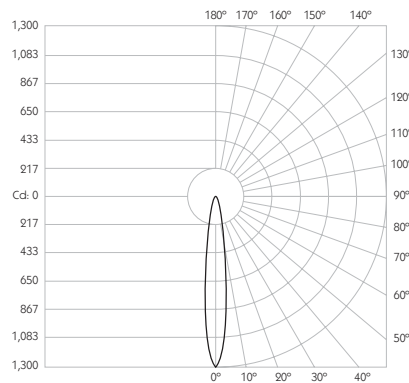


Distance (m)	Beam Diameter (m)	Illuminance (lx)
1m	0.21m	1,920 lx
2m	0.42m	305 lx
3m	0.63m	136 lx
4m	0.84m	76 lx
5m	1.05m	49 lx

	BT-732-AL-XX9512	RT-732-AL-XX9512		MPS-732-AL-XX9512		MPX-732-AL-XX9512	MPY-732-AL-XX9512	MPZ-732-AL-XX9512
		RT-732-BK-XX9512		MPS-732-BK-XX9512		MPX-732-BK-XX9512	MPY-732-BK-XX9512	MPZ-732-BK-XX9512
		RT-732-WH-XX9512		MPS-732-WH-XX9512		MPX-732-WH-XX9512	MPY-732-WH-XX9512	MPZ-732-WH-XX9512

For 3000K Substitute XX with 30 | For 2700K Substitute XX with 27





Category Interior use only IP20
Material Machined Aluminium
Finish Brushed Aluminium | Black | White | Custom
System Monopoint | LV tracks
Lockable Pan & Tilt
System Power 1.9W
Module Output 140lm
Absolute Output 114lm
LOR 81%
Colour Temperature 3000K | 2700K | *
CRI Ra: 95 **TM-30** Rf: 93 Rg: 99
Optics 30°
Gear Type Dimmable options available
Weight 101g
Stem Length 360mm | Custom available upon request

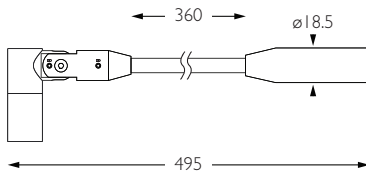

Pico S1 Long Snoot is a discreet, low glare 95CRI LED spotlight, mounted to a 360mm stem. The spotlight comes as standard in white, black and brushed aluminium finishes, and has three site changeable optics for flexible distribution. Movement is aided with a low friction bearing rotation and constant torque tilt mechanism, lockable in both pan and tilt. The Precision Lighting Jack Plug system enables the luminaire to be easily disconnected and reconnected to all of Precision Lighting's systems, offering flexibility throughout the product's lifetime. The onboard 24V driver ensures overcurrent protection and is not polarity sensitive. Pico S1 is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 125lm at 1.9W.

Product Photometry independently tested in accordance with LM-79

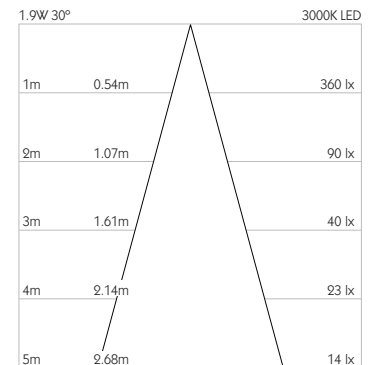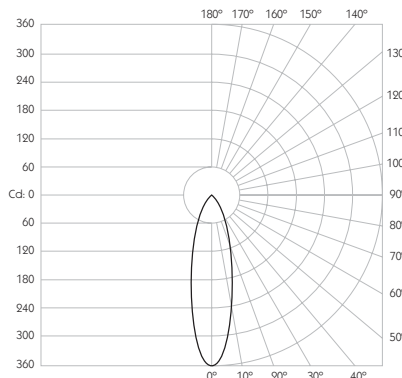

IP 20	95 CRI	CE	ETL US
LED	1.9W	24V	PART L
360°	180°	0.5m	Accessories Available

Accessories	Cable	Basis Track	ReTrac	Eutrac	Trimless Monopoint	Power Monopoint	Flat Monopoint	Node Monopoint	Surface Monopoint
Grey		BT-732-AL-XX9530	RT-732-AL-XX9530		MPS-732-AL-XX9530		MPX-732-AL-XX9530	MPY-732-AL-XX9530	MPZ-732-AL-XX9530
Black			RT-732-BK-XX9530		MPS-732-BK-XX9530		MPX-732-BK-XX9530	MPY-732-BK-XX9530	MPZ-732-BK-XX9530
White			RT-732-WH-XX9530		MPS-732-WH-XX9530		MPX-732-WH-XX9530	MPY-732-WH-XX9530	MPZ-732-WH-XX9530

For 3000K Substitute XX with 30 | For 2700K Substitute XX with 27



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium | Black | White | Custom

System Monopoint | LV tracks

Lockable Pan & Tilt

System Power 1.9W

Module Output 140lm

Absolute Output 125lm

LOR 89%

Colour Temperature 3000K | 2700K | *

CRI Ra: 95 **TM-30** Rf: 93 Rg: 99


Optics 60°

Gear Type Dimmable options available

Weight 101g





Stem Length 360mm | Custom available upon request

* Please enquire as to the availability of non-standard Colour Temperatures.

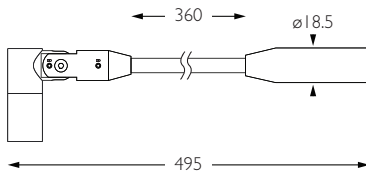

Pico S1 Long Snoot is a discreet, low glare 95CRI LED spotlight, mounted to a 360mm stem. The spotlight comes as standard in white, black and brushed aluminium finishes, and has three site changeable optics for flexible distribution. Movement is aided with a low friction bearing rotation and constant torque tilt mechanism, lockable in both pan and tilt. The Precision Lighting Jack Plug system enables the luminaire to be easily disconnected and reconnected to all of Precision Lighting's systems, offering flexibility throughout the product's lifetime. The onboard 24V driver ensures overcurrent protection and is not polarity sensitive. Pico S1 is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 125lm at 1.9W.

Product Photometry independently tested in accordance with LM-79

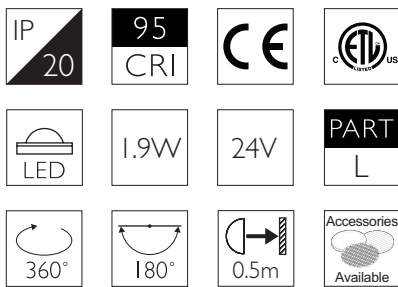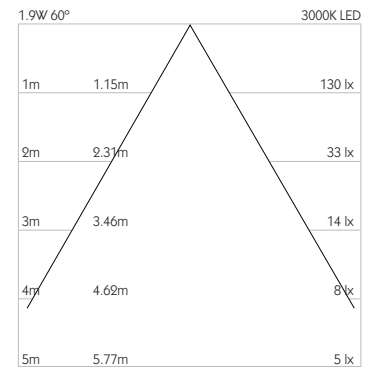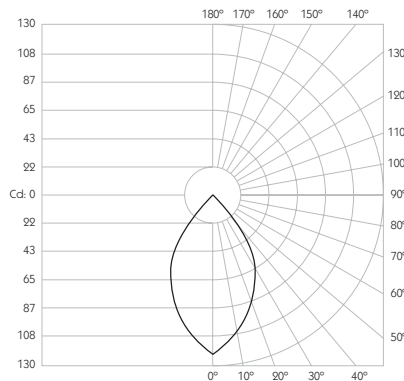

Finish	Cable	Basis Track	ReTrac	Eutrac	Trimless Monopoint	Power Monopoint	Flat Monopoint	Node Monopoint	Surface Monopoint
Grey		BT-732-AL-XX9560	RT-732-AL-XX9560		MPS-732-AL-XX9560		MPX-732-AL-XX9560	MPY-732-AL-XX9560	MPZ-732-AL-XX9560
Black			RT-732-BK-XX9560		MPS-732-BK-XX9560		MPX-732-BK-XX9560	MPY-732-BK-XX9560	MPZ-732-BK-XX9560
White			RT-732-WH-XX9560		MPS-732-WH-XX9560		MPX-732-WH-XX9560	MPY-732-WH-XX9560	MPZ-732-WH-XX9560

For 3000K Substitute XX with 30 | For 2700K Substitute XX with 27