

DOMINO 2 SURFACE



NARROW SPOT



- Category** Interior use only IP20
- Material** Machined Aluminium
- Finish** Brushed Aluminium | Black | White | Custom
- Cutout** $\varnothing 17\text{mm}$
- Min. Ceiling Thickness** 5mm
- Accessories** Lenses
- System Power** 4.4W
- Module Output** 356lm
- Absolute Output** 329lm
- LOR** 93%
- Colour Temperature** 3000K*
- CRI** Ra: 95 **TM-30** Rf: 93 Rg: 99
- Optics** 12°
- Gear Type** Dimmable options available
- Weight** 101g




* Please enquire as to the availability of non-standard colour temperatures.

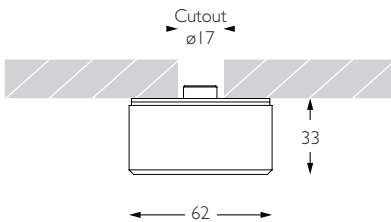

Domino 2 Surface is a low profile, surface-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in white, black and brushed aluminium finishes, and has five changeable optics for flexible distribution. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 2 Surface is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 356lm at 4.4W.

Product Photometry independently tested in accordance with LM-79

IP 20	LED	95 CRI	700 mA
4.4W	0.5m	CE	PART L
17	Accessories Available	ETL US	

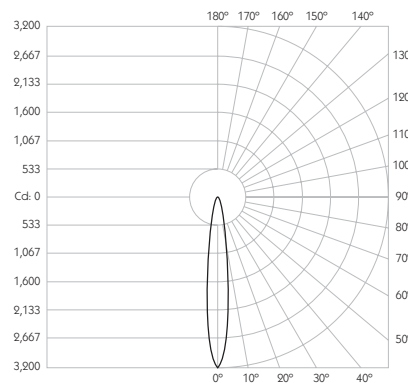

Distance	Beam Diameter	Illuminance (lx)
1m	0.21m	3,140 lx
2m	0.42m	785 lx
3m	0.63m	350 lx
4m	0.84m	196 lx
5m	1.05m	125 lx



Surface

TZ-652-AL-309512

TZ-652-BK-309512

TZ-652-WH-309512



PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA
t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626



FLOOD



- Category** Interior use only IP20
- Material** Machined Aluminium
- Finish** Brushed Aluminium | Black | White | Custom
- Cutout** ø17mm
- Min. Ceiling Thickness** 5mm
- Accessories** Lenses
- System Power** 4.4W
- Module Output** 356lm
- Absolute Output** 301lm
- LOR** 84%
- Colour Temperature** 3000K*
- CRI** Ra: 95 **TM-30** Rf: 93 Rg: 99
- Optics** 30°
- Gear Type** Dimmable options available
- Weight** 101g





* Please enquire as to the availability of non-standard colour temperatures.

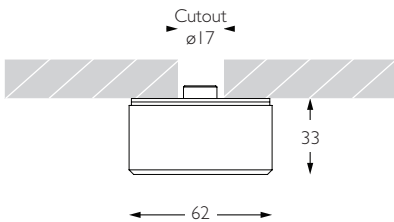

Domino 2 Surface is a low profile, surface-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in white, black and brushed aluminium finishes, and has five changeable optics for flexible distribution. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 2 Surface is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 356lm at 4.4W.

Product Photometry independently tested in accordance with LM-79

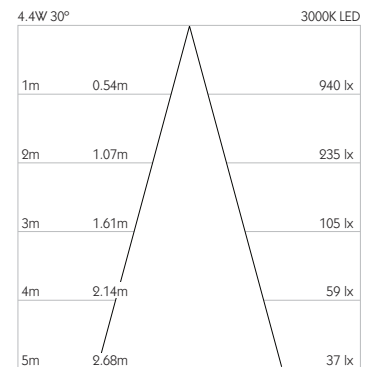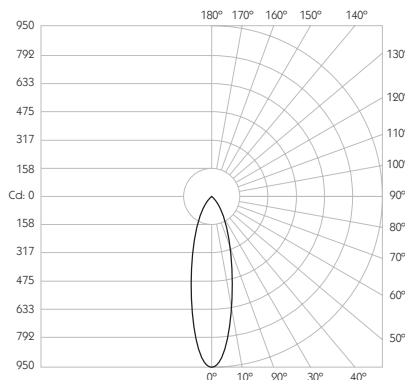

IP
20

LED

95
CRI

700
mA

4.4W

0.5m

CE

PART
L

17

Accessories
Available

ETL
US



Surface

TZ-652-AL-309530

TZ-652-BK-309530

TZ-652-WH-309530



PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA
t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626



WIDE FLOOD



Category Interior use only IP20
Material Machined Aluminium
Finish Brushed Aluminium | Black | White | Custom
Cutout ø17mm
Min. Ceiling Thickness 5mm
Accessories Lenses
System Power 4.4W
Module Output 356lm
Absolute Output 327lm
LOR 92%
Colour Temperature 3000K*
CRI Ra: 95 **TM-30** Rf: 93 Rg: 99
Optics 60°
Gear Type Dimmable options available
Weight 101g





* Please enquire as to the availability of non-standard colour temperatures.

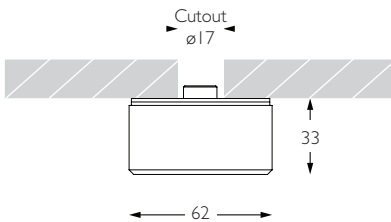

Domino 2 Surface is a low profile, surface-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in white, black and brushed aluminium finishes, and has five changeable optics for flexible distribution. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 2 Surface is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 356lm at 4.4W.

Product Photometry independently tested in accordance with LM-79

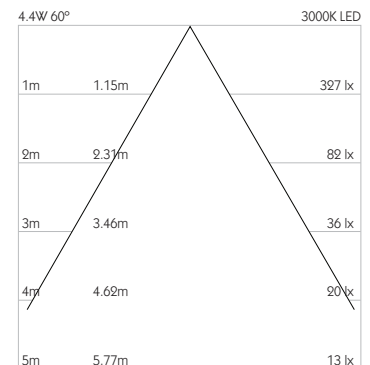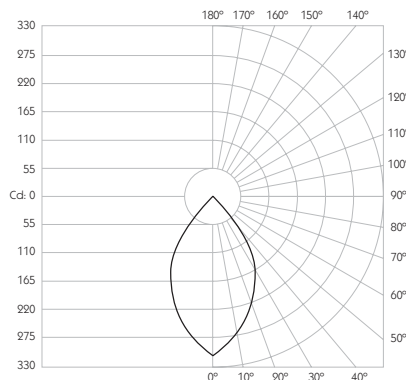

IP 20	LED	95 CRI	700 mA
4.4W	0.5m	CE	PART L
17	Accessories Available	ETL US	



Surface

TZ-652-AL-309560

TZ-652-BK-309560

TZ-652-WH-309560



PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA
t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626



ELLIPSE



- Category** Interior use only IP20
- Material** Machined Aluminium
- Finish** Brushed Aluminium | Black | White | Custom
- Cutout** ø17mm
- Min. Ceiling Thickness** 5mm
- Accessories** Lenses
- System Power** 4.4W
- Module Output** 356lm
- Absolute Output** 327lm
- LOR** 92%
- Colour Temperature** 3000K*
- CRI** Ra: 95 **TM-30** Rf: 93 Rg: 99
- Optics** 12X35°
- Gear Type** Dimmable options available
- Weight** 101g




* Please enquire as to the availability of non-standard colour temperatures.

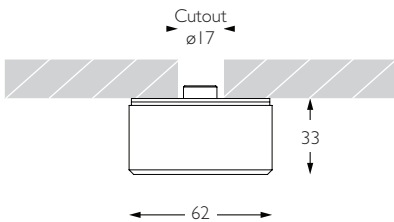

Domino 2 Surface is a low profile, surface-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in white, black and brushed aluminium finishes, and has five changeable optics for flexible distribution. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 2 Surface is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 356lm at 4.4W.

Product Photometry independently tested in accordance with LM-79

IP 20	LED	95 CRI	700 mA
4.4W	0.5m	CE	PART L
17	Accessories Available	ETL US	

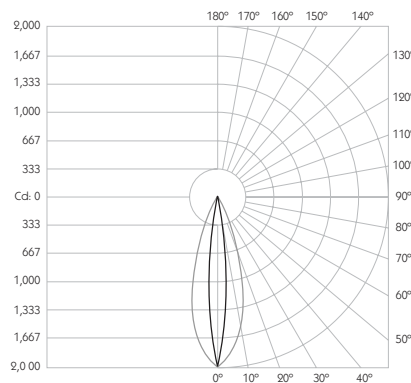

Distance	Beam Width	Beam Height	Footcandle (lx)
1m	0.63m	0.21m	1,950 lx
2m	1.26m	0.42m	487 lx
3m	1.89m	0.63m	216 lx
4m	2.52m	0.84m	121 lx
5m	3.15m	1.05m	78 lx



Surface

TZ-652-AL-3095E1



TZ-652-BK-3095E1

TZ-652-WH-3095E1

PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA
t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626



VERTICAL ELLIPSE



- Category** Interior use only IP20
- Material** Machined Aluminium
- Finish** Brushed Aluminium | Black | White | Custom
- Cutout** $\varnothing 17\text{mm}$
- Min. Ceiling Thickness** 5mm
- Accessories** Lenses
- System Power** 4.4W
- Module Output** 356lm
- Absolute Output** 327lm
- LOR** 92%
- Colour Temperature** 3000K*
- CRI** Ra: 95 **TM-30** Rf: 93 Rg: 99
- Optics** 35X12°
- Gear Type** Dimmable options available
- Weight** 101g




* Please enquire as to the availability of non-standard colour temperatures.

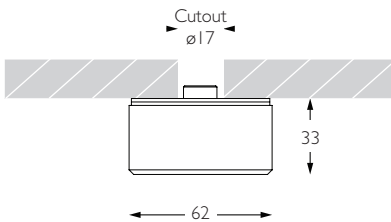

Domino 2 Surface is a low profile, surface-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in white, black and brushed aluminium finishes, and has five changeable optics for flexible distribution. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 2 Surface is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 356lm at 4.4W.

Product Photometry independently tested in accordance with LM-79

IP 20	LED	95 CRI	700 mA
4.4W	0.5m	CE	PART L
17	Accessories Available	ETL US	

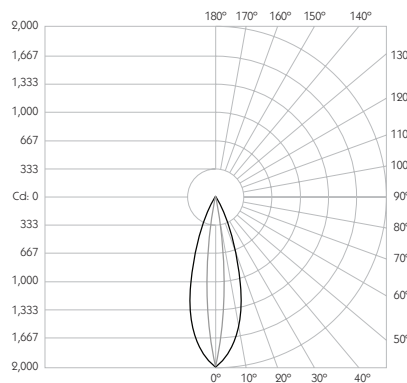

Distance	Beam Width	Beam Height	Footcandle (lx)
1m	0.63m	0.21m	1,950 lx
2m	1.26m	0.42m	487 lx
3m	1.89m	0.63m	216 lx
4m	2.52m	0.84m	121 lx
5m	3.15m	1.05m	78 lx



Surface

TZ-652-AL-3095E2

TZ-652-BK-3095E2

TZ-652-WH-3095E2



PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA
t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626