





Category Interior use only IP20
Material Machined Aluminium | Machined Brass
Canopy Finish Brushed Aluminium | Rubbed Bronze | Black | White | Custom
System Jack Plug Connector
LV Rating 75W Max at 12V
LED Rating 150W Max at 24V
Cut Out Hole NA [surface mounted]
Minimum Ceiling Void Depth NA [surface mounted]
Maximum Material Thickness NA [surface mounted]
Distance Between Screws 50mm
Accessories Plug
Weight AL | BK | WH - 90g | RB - 210g



The Surface Monopoint is designed for use on beams, walls and ceilings, where the Jack Plug system cannot be recessed into the mounting surface. It is powered by a remote transformer, and is available in brushed aluminium, rubbed bronze, black and white, with custom finishes available on request. Ideal for use with a BESA box.

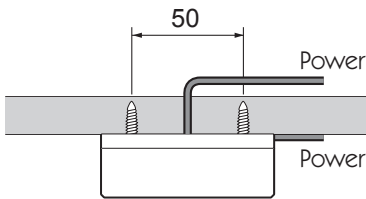

The Jack Plug system allows the luminaires to be easily removed for cleaning or relamping. The luminaires click into the Jack Plug socket, the threaded jacket then screws into position to lock the connection in place. Once fixed, the luminaires are free to rotate or alternatively, can be secured in place using two locking pins.




Ceiling Material



LED Luminaires

LV Luminaires



Evo LED

Oculus

Discus

Pico

Evo

Evo S

Retro

Radar

Rotor

Demilumen

	•	•	•	•	•	•	•	•	•	
	•				•					
	•	•	•	•	•	•	•	•	•	
	•	•	•	•	•	•	•	•	•	