

# MINIJOLLY 500mA 20W DRIVER

LED power supplies  
spec sheet PSCC-20-500-A-TC

1-10V



**Category** IP20

**Input Voltage** 220-240V AC | 110-127V<sup>1</sup>

**Mains Frequency** 50/60Hz

**Output Current** 500ma

**Output Power** 20W | 15W<sup>1</sup>

**Dimming** 1-10V

**Weight** 108g

**Finish** White



**Max Distance** ECG-Luminaire 10m

**Compatibility** Pico Surface [MPN-701] | Minimo 1 | Minimo 11


**Luminaire Wiring** Series circuit

**Order Code** PSCC-20-500-A-TC

<sup>1</sup> At Input Voltage Rating of 110-127V, Output Power is 15W

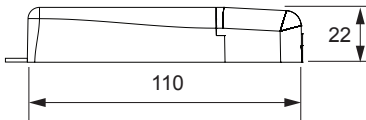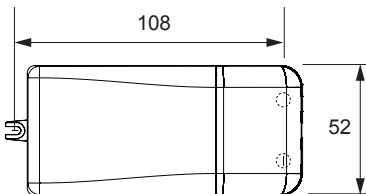

The TCI MiniJolly Driver is suitable for use with our 500mA constant current LED luminaires, Pico Surface, Minimo and Minimo 11. It is for use with the luminaires wired in series. The driver has protection against overheating, short circuit, voltage spikes and overload. This power supply is dimmable with a 1-10V control signal.




Luminaire



Pico Surface



Minimo 1



Minimo 11

Qty. Connected  
Luminaires<sup>1</sup>

1 - 9

1 - 9

1 - 2

<sup>1</sup> Quantities correct for input voltage rating of 220-240V. At input voltage rating of 110-127V, please enquire for quantity of connected luminaires

PRECISION  
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK  
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD  
LONDON SW17 0BA  
t. +44 (0) 20 8947 6616  
f. +44 (0) 20 8286 6626

Version 12.16