

MINIJOLLY 700mA 20W DRIVER

LED power supplies
spec sheet PSCC-20-700-A-TC

1-10V



Category IP20

Input Voltage 220-240V AC | 110-127V¹

Mains Frequency 50/60Hz

Output Current 700ma

Output Power 20W | 15W¹

Dimming 1-10V

Weight 108g

Finish White



Max Distance ECG-Luminaire 10m

Compatibility Domino [651, 652, 654] Surface and Recessed | Minimo 16


Luminaire Wiring Series circuit

Order Code PSCC-20-700-A-TC


¹ At Input Voltage Rating of 110-127V, Output Power is 15W

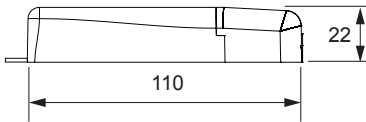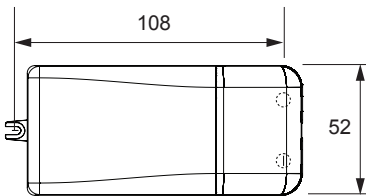

The TCI MiniJolly Driver is suitable for use with our 700mA constant current Domino Surface and Recessed luminaires and Minimo 16. It is for use with the luminaires wired in series. The driver has protection against overheating, short circuit, voltage spikes and overload. This power supply is dimmable with a 1-10V control signal.



Luminaire




Domino 4*



Domino 2*



Domino 1*



Minimo 16

Qty. Connected
Luminaires¹

1

1 - 3

1 - 6

1

* Applies to Domino Recessed and Surface only. For Domino Basis Track variations, please refer to constant voltage driver datasheets.

¹ Quantities correct for input voltage rating of 220-240V. At input voltage rating of 110-127V, please enquire for quantity of connected luminaires

PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK

WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA

t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626

Version 12.16