

MINIMO FIXED SQUARE

NARROW SPOT



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium | Black | White | Custom

Cutout ø33mm

Ceiling Thickness 3 - 25mm

Minimum Ceiling Void 20mm above top of luminaire module

System Power 1.6W

Module Output 140lm **Absolute Output** 125lm

LOR 89%

Glare Cut Off 15°

Glare Comfort Cut Off 45°

Colour Temperature 3000K | 2700K | *

CRI Ra: 95 **TM-30** Rf: 93 Rg: 99


Optic 12°

Gear Type Dimmable options available


Gear Location Remote - No access through cutout for dimmable drivers

Weight 52g

* Please enquire as to the availability of non-standard Colour Temperatures

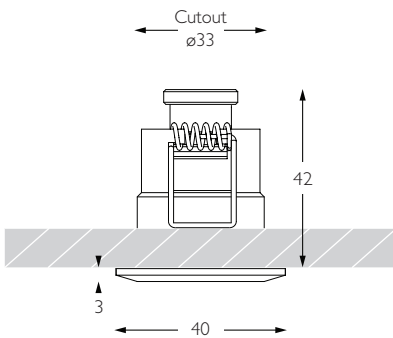


Glare Diagram

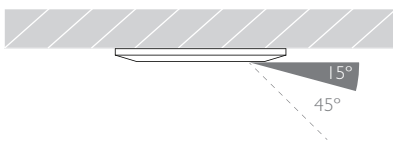

Cut Off: 15°
Glare Comfort Cut Off: 45°

Minimo Fixed Square is a miniature recessed LED luminaire providing high performance accent lighting from a compact source. With 95CRI, Minimo Fixed is perfect for use in colour-critical applications. Tool-less, site changeable optics allow flexibility in varying environments. Minimo Fixed is machined from aerospace grade 6063-T6 aluminium, is available as standard in white, black and brushed aluminium finishes, and delivers a lumen package of 140lm at 1.6W.

Product Photometry independently tested in accordance with LM-79

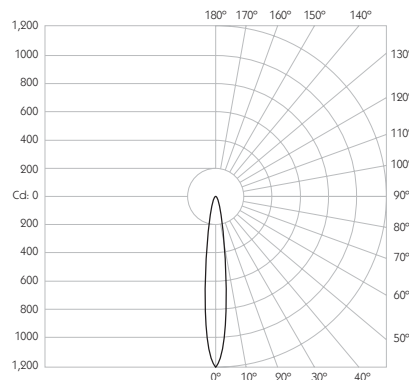

Distance (m)	Beam Diameter (m)	Illuminance (lx)
1m	0.21m	1,193 lx
2m	0.42m	298 lx
3m	0.63m	133 lx
4m	0.84m	75 lx
5m	1.05m	48 lx

IP 20	95 CRI	CE	ETL US
LED	1.6W	3.2V 500mA	PART L
33	0.5m		



Square Bezel

RS-601-AL-XX9512

RS-601-BK-XX9512

RS-601-WH-XX9512




MINIMO FIXED SQUARE

FLOOD




Category Interior use only IP20
Material Machined Aluminium
Finish Brushed Aluminium | Black | White | Custom
Cutout ø33mm
Ceiling Thickness 3 - 25mm
Minimum Ceiling Void 20mm above top of luminaire module
System Power 1.6W
Module Output 140lm **Absolute Output** 114lm
LOR 81%
Glare Cut Off 15°
Glare Comfort Cut Off 45°
Colour Temperature 3000K | 2700K | *
CRI Ra: 95 **TM-30** Rf: 93 Rg: 99
Optic 30°
Gear Type Dimmable options available
Gear Location Remote - No access through cutout for dimmable drivers
Weight 52g

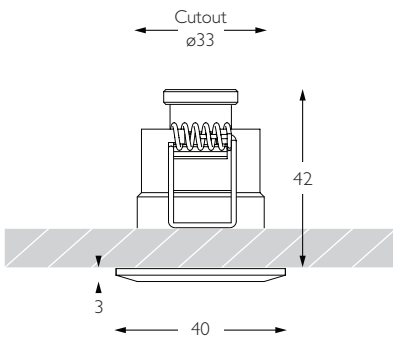

* Please enquire as to the availability of non-standard Colour Temperatures

Glare Diagram

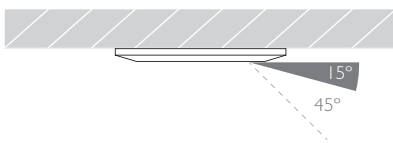


Minimo Fixed Square is a miniature recessed LED luminaire providing high performance accent lighting from a compact source. With 95CRI, Minimo Fixed is perfect for use in colour-critical applications. Tool-less, site changeable optics allow flexibility in varying environments. Minimo Fixed is machined from aerospace grade 6063-T6 aluminium, is available as standard in white, black and brushed aluminium finishes, and delivers a lumen package of 140lm at 1.6W.

Cut Off: 15°
Glare Comfort Cut Off: 45°

Product Photometry independently tested in accordance with LM-79

IP 20	95 CRI	CE	ETL US
LED	1.6W	3.2V 500mA	PART L
33	0.5m		

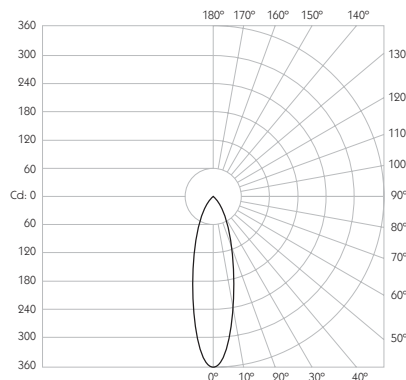

Distance	Beam Diameter	Illuminance (lx)
1m	0.54m	360 lx
2m	1.07m	90 lx
3m	1.61m	40 lx
4m	2.14m	23 lx
5m	2.68m	14 lx



Square Bezel

Grey	RS-601-AL-XX9530
Black	RS-601-BK-XX9530
White	RS-601-WH-XX9530

MINIMO FIXED SQUARE

WIDE FLOOD



Category Interior use only IP20

Material Machined Aluminium

Finish Brushed Aluminium | Black | White | Custom

Cutout ø33mm

Ceiling Thickness 3 - 25mm

Minimum Ceiling Void 20mm above top of luminaire module

System Power 1.6W

Module Output 140lm **Absolute Output** 125lm

LOR 89%

Glare Cut Off 15°

Glare Comfort Cut Off 45°

Colour Temperature 3000K | 2700K | *

CRI Ra: 95 **TM-30** Rf: 93 Rg: 99


Optic 60°

Gear Type Dimmable options available


Gear Location Remote - No access through cutout for dimmable drivers

Weight 52g

* Please enquire as to the availability of non-standard Colour Temperatures

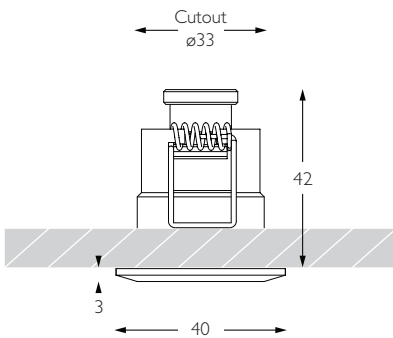


Glare Diagram

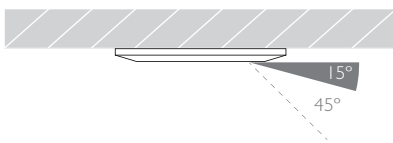



Cut Off: 15°

Glare Comfort Cut Off: 45°

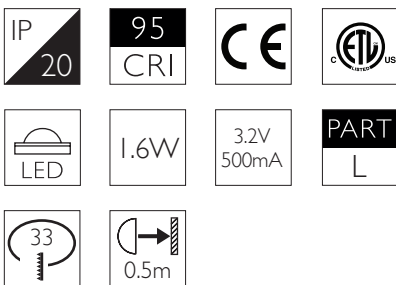

Minimo Fixed Square is a miniature recessed LED luminaire providing high performance accent lighting from a compact source. With 95CRI, Minimo Fixed is perfect for use in colour-critical applications. Tool-less, site changeable optics allow flexibility in varying environments. Minimo Fixed is machined from aerospace grade 6063-T6 aluminium, is available as standard in white, black and brushed aluminium finishes, and delivers a lumen package of 140lm at 1.6W.

Product Photometry independently tested in accordance with LM-79

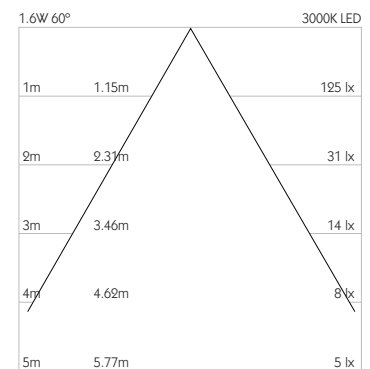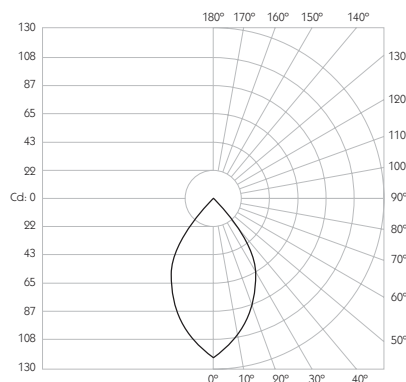

Square Bezel

RS-601-AL-XX9560

RS-601-BK-XX9560

RS-601-WH-XX9560

