

# MINIMO FIXED CIRCULAR

luminaires  
spec sheet 602

DEEP RECESS | NARROW SPOT



**Category** Interior use only IP20

**Material** Machined Aluminium | Machined Brass

**Finish** Aluminium | Rubbed Bronze | Polished Brass | Black | White | Custom

**Cutout** ø33mm

**Ceiling Thickness** 3 - 25mm

**Minimum Ceiling Void** 20mm above top of luminaire module

**System Power** 1.6W

**Module Output** 140lm      **Absolute Output** 124lm

**LOR** 89%

**Glare Cut Off** 30°

**Glare Comfort Cut Off** 68°

**Colour Temperature** 3000K | 2700K | \*

**CRI** Ra: 95      **TM-30** Rf: 93 Rg: 99


**Optic** 12°

**Gear Type** Dimmable options available


**Gear Location** Remote - No access through cutout for dimmable drivers

**Weight** AL BK WH - 53g | RB PB - 101g

\* Please enquire as to the availability of non-standard Colour Temperatures

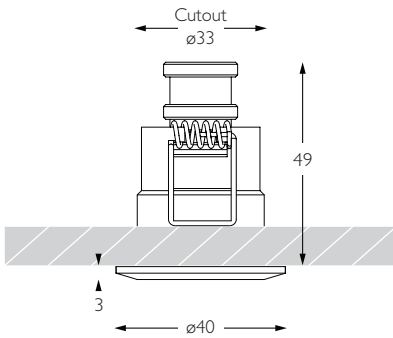


Glare Diagram

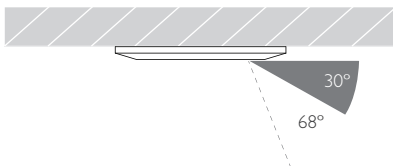

Cut Off: 30°  
Glare Comfort Cut Off: 68°

Minimo Fixed Circular is a miniature recessed LED luminaire providing high performance accent lighting from a compact source with minimal glare. With 95CRI, Minimo Fixed is perfect for use in colour-critical applications. Tool-less, site changeable optics allow flexibility in varying environments. Minimo Fixed is machined from aerospace grade 6063-T6 aluminium or brass, and is available as standard in white, black, polished brass, rubbed bronze and brushed aluminium finishes, and delivers a lumen package of 140lm at 1.6W.

Product Photometry independently tested in accordance with LM-79

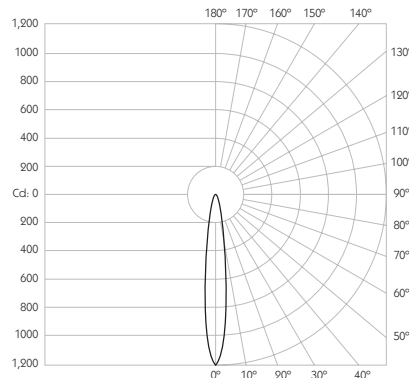

Distance (m)	Beam Diameter (m)	Illuminance (lx)
1m	0.21m	1,193 lx
2m	0.42m	298 lx
3m	0.63m	133 lx
4m	0.84m	75 lx
5m	1.05m	48 lx

IP 20	95 CRI	CE	ETL US
LED	1.6W	3.2V 500mA	PART L
33	0.5m		



Circular Bezel

RC-602-AL-XX9512	
RC-602-RB-XX9512	
RC-602-PB-XX9512	
RC-602-BK-XX9512	
RC-602-WH-XX9512	

For 3000K Substitute XX with 30 | For 2700K Substitute XX with 27

PRECISION  
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK  
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD  
LONDON SW17 0BA  
t. +44 (0) 20 8947 6616  
f. +44 (0) 20 8286 6626

# MINIMO FIXED CIRCULAR

DEEP RECESS | FLOOD



**Category** Interior use only IP20

**Material** Machined Aluminium | Machined Brass

**Finish** Aluminium | Rubbed Bronze | Polished Brass | Black | White | Custom

**Cutout** ø33mm

**Ceiling Thickness** 3 - 25mm

**Minimum Ceiling Void** 20mm above top of luminaire module

**System Power** 1.6W

**Module Output** 140lm      **Absolute Output** 113lm

**LOR** 81%

**Glare Cut Off** 30°

**Glare Comfort Cut Off** 68°

**Colour Temperature** 3000K | 2700K | \*

**CRI** Ra: 95      **TM-30** Rf: 93 Rg: 99


**Optic** 30°

**Gear Type** Dimmable options available


**Gear Location** Remote - No access through cutout for dimmable drivers

**Weight** AL BK WH - 53g | RB PB - 101g

\* Please enquire as to the availability of non-standard Colour Temperatures

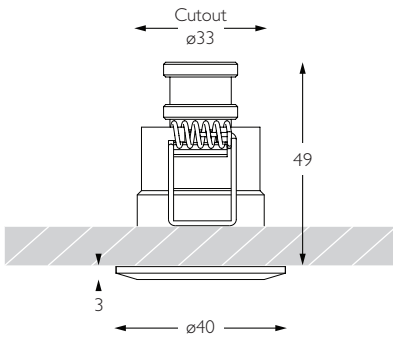


Glare Diagram

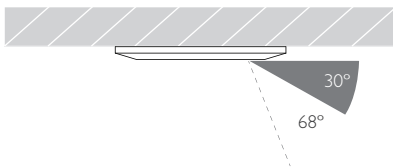

Cut Off: 30°  
Glare Comfort Cut Off: 68°

Minimo Fixed Circular is a miniature recessed LED luminaire providing high performance accent lighting from a compact source with minimal glare. With 95CRI, Minimo Fixed is perfect for use in colour-critical applications. Tool-less, site changeable optics allow flexibility in varying environments. Minimo Fixed is machined from aerospace grade 6063-T6 aluminium or brass, and is available as standard in white, black, polished brass, rubbed bronze and brushed aluminium finishes, and delivers a lumen package of 140lm at 1.6W.

Product Photometry independently tested in accordance with LM-79

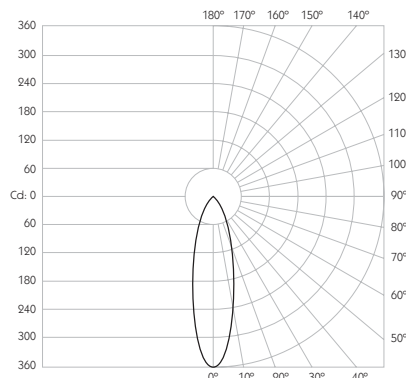

Distance (m)	Beam Diameter (m)	Illuminance (lx)
1m	0.54m	360 lx
2m	1.07m	90 lx
3m	1.61m	40 lx
4m	2.14m	23 lx
5m	2.68m	14 lx

IP 20	95 CRI	CE	ETL US
LED	1.6W	3.2V 500mA	PART L
33	0.5m		



Circular Bezel

Grey	RC-602-AL-XX9530
Brown	RC-602-RB-XX9530
Gold	RC-602-PB-XX9530
Black	RC-602-BK-XX9530
White	RC-602-WH-XX9530

For 3000K Substitute XX with 30 | For 2700K Substitute XX with 27

PRECISION  
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK  
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD  
LONDON SW17 0BA  
t. +44 (0) 20 8947 6616  
f. +44 (0) 20 8286 6626

# MINIMO FIXED CIRCULAR

DEEP RECESS | WIDE FLOOD



**Category** Interior use only IP20

**Material** Machined Aluminium | Machined Brass

**Finish** Aluminium | Rubbed Bronze | Polished Brass | Black | White | Custom

**Cutout** ø33mm

**Ceiling Thickness** 3 - 25mm

**Minimum Ceiling Void** 20mm above top of luminaire module

**System Power** 1.6W

**Module Output** 140lm      **Absolute Output** 124lm

**LOR** 89%

**Glare Cut Off** 30°

**Glare Comfort Cut Off** 68°

**Colour Temperature** 3000K | 2700K | \*

**CRI** Ra: 95      **TM-30** Rf: 93 Rg: 99


**Optic** 60°

**Gear Type** Dimmable options available


**Gear Location** Remote - No access through cutout for dimmable drivers

**Weight** AL BK WH - 53g | RB PB - 101g

\* Please enquire as to the availability of non-standard Colour Temperatures

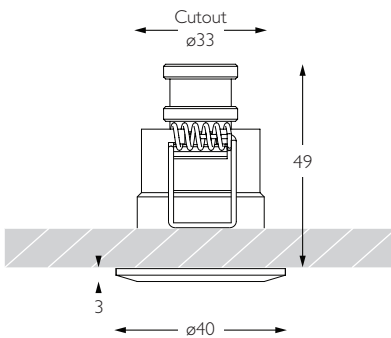


Glare Diagram

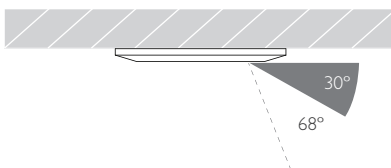

Cut Off: 30°  
Glare Comfort Cut Off: 68°

Minimo Fixed Circular is a miniature recessed LED luminaire providing high performance accent lighting from a compact source with minimal glare. With 95CRI, Minimo Fixed is perfect for use in colour-critical applications. Tool-less, site changeable optics allow flexibility in varying environments. Minimo Fixed is machined from aerospace grade 6063-T6 aluminium or brass, and is available as standard in white, black, polished brass, rubbed bronze and brushed aluminium finishes, and delivers a lumen package of 140lm at 1.6W.

Product Photometry independently tested in accordance with LM-79

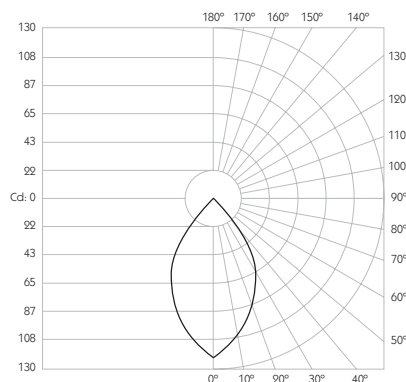

Distance (m)	Beam Diameter (m)	Illuminance (lx)
1m	1.15m	125 lx
2m	2.31m	31 lx
3m	3.46m	14 lx
4m	4.62m	8 lx
5m	5.77m	5 lx

IP 20	95 CRI	CE	ETL US
LED	1.6W	3.2V 500mA	PART L
33	0.5m		



Circular Bezel

RC-602-AL-XX9560	
RC-602-RB-XX9560	
RC-602-PB-XX9560	
RC-602-BK-XX9560	
RC-602-WH-XX9560	

For 3000K Substitute XX with 30 | For 2700K Substitute XX with 27

PRECISION  
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK  
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD  
LONDON SW17 0BA  
t. +44 (0) 20 8947 6616  
f. +44 (0) 20 8286 6626