

MINIMO FIXED CIRCULAR

luminaires
spec sheet 602

DEEP RECESS | NARROW SPOT



Category Interior use only IP20

Material Machined Aluminium | Machined Brass

Finish Aluminium | Rubbed Bronze | Polished Brass | Black | White | Custom

Cutout ø33mm

Ceiling Thickness 3 - 25mm

Minimum Ceiling Void 20mm above top of luminaire module

System Power 1.6W

Module Output 140lm **Absolute Output** 124lm

LOR 89%

Glare Cut Off 30°

Glare Comfort Cut Off 68°

Colour Temperature 3000K | 2700K | *

CRI Ra: 95 **TM-30** Rf: 93 Rg: 99


Optic 12°

Gear Type Dimmable options available


Gear Location Remote - No access through cutout for dimmable drivers

Weight AL BK WH - 53g | RB PB - 101g

* Please enquire as to the availability of non-standard Colour Temperatures

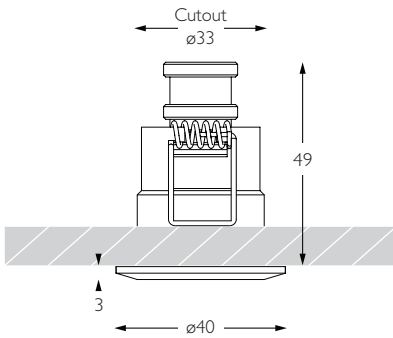


Glare Diagram

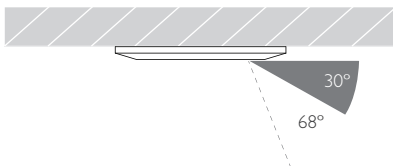

Cut Off: 30°
Glare Comfort Cut Off: 68°

Minimo Fixed Circular is a miniature recessed LED luminaire providing high performance accent lighting from a compact source with minimal glare. With 95CRI, Minimo Fixed is perfect for use in colour-critical applications. Tool-less, site changeable optics allow flexibility in varying environments. Minimo Fixed is machined from aerospace grade 6063-T6 aluminium or brass, and is available as standard in white, black, polished brass, rubbed bronze and brushed aluminium finishes, and delivers a lumen package of 140lm at 1.6W.

Product Photometry independently tested in accordance with LM-79

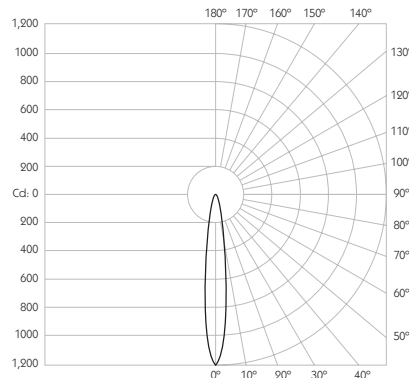

Distance (m)	Beam Diameter (m)	Illuminance (lx)
1m	0.21m	1,193 lx
2m	0.42m	298 lx
3m	0.63m	133 lx
4m	0.84m	75 lx
5m	1.05m	48 lx

-
-
-
-
-
-
-
-
-
-



Circular Bezel

	RC-602-AL-XX9512
	RC-602-RB-XX9512
	RC-602-PB-XX9512
	RC-602-BK-XX9512
	RC-602-WH-XX9512

For 3000K Substitute XX with 30 | For 2700K Substitute XX with 27

**PRECISION
LIGHTING**

SALES@PRECISIONLIGHTING.CO.UK
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA
t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626

MINIMO FIXED CIRCULAR

DEEP RECESS | FLOOD



Category Interior use only IP20

Material Machined Aluminium | Machined Brass

Finish Aluminium | Rubbed Bronze | Polished Brass | Black | White | Custom

Cutout ø33mm

Ceiling Thickness 3 - 25mm

Minimum Ceiling Void 20mm above top of luminaire module

System Power 1.6W

Module Output 140lm **Absolute Output** 113lm

LOR 81%

Glare Cut Off 30°

Glare Comfort Cut Off 68°

Colour Temperature 3000K | 2700K | *

CRI Ra: 95 **TM-30** Rf: 93 Rg: 99


Optic 30°

Gear Type Dimmable options available


Gear Location Remote - No access through cutout for dimmable drivers

Weight AL BK WH - 53g | RB PB - 101g

* Please enquire as to the availability of non-standard Colour Temperatures

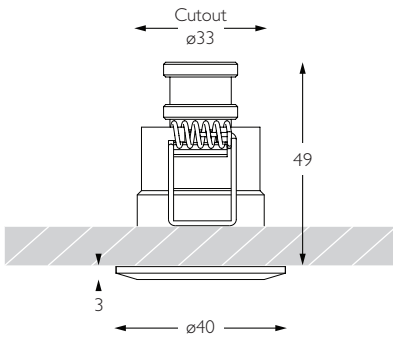



Glare Diagram

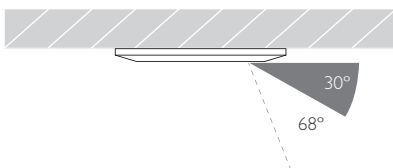

Cut Off: 30°
Glare Comfort Cut Off: 68°

Minimo Fixed Circular is a miniature recessed LED luminaire providing high performance accent lighting from a compact source with minimal glare. With 95CRI, Minimo Fixed is perfect for use in colour-critical applications. Tool-less, site changeable optics allow flexibility in varying environments. Minimo Fixed is machined from aerospace grade 6063-T6 aluminium or brass, and is available as standard in white, black, polished brass, rubbed bronze and brushed aluminium finishes, and delivers a lumen package of 140lm at 1.6W.

Product Photometry independently tested in accordance with LM-79

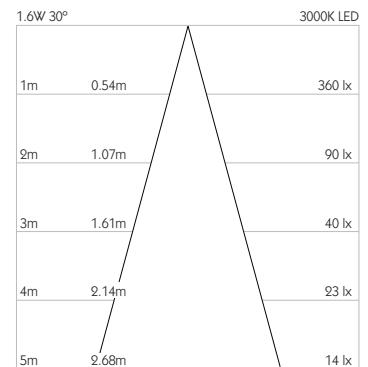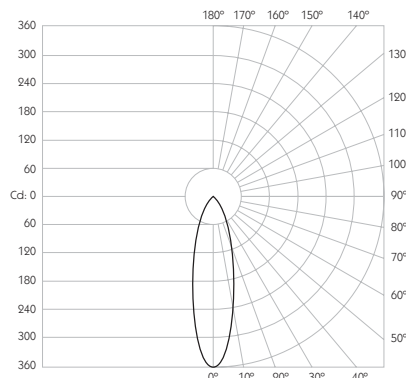

IP 20	95 CRI	CE	ETL US
LED	1.6W	3.2V 500mA	PART L
33	0.5m		



Circular Bezel

RC-602-AL-XX9530	
RC-602-RB-XX9530	
RC-602-PB-XX9530	
RC-602-BK-XX9530	
RC-602-WH-XX9530	

For 3000K Substitute XX with 30 | For 2700K Substitute XX with 27

PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA
t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626

MINIMO FIXED CIRCULAR

DEEP RECESS | WIDE FLOOD



Category Interior use only IP20

Material Machined Aluminium | Machined Brass

Finish Aluminium | Rubbed Bronze | Polished Brass | Black | White | Custom

Cutout ø33mm

Ceiling Thickness 3 - 25mm

Minimum Ceiling Void 20mm above top of luminaire module

System Power 1.6W

Module Output 140lm **Absolute Output** 124lm

LOR 89%

Glare Cut Off 30°

Glare Comfort Cut Off 68°

Colour Temperature 3000K | 2700K | *

CRI Ra: 95 **TM-30** Rf: 93 Rg: 99


Optic 60°

Gear Type Dimmable options available


Gear Location Remote - No access through cutout for dimmable drivers

Weight AL BK WH - 53g | RB PB - 101g

* Please enquire as to the availability of non-standard Colour Temperatures

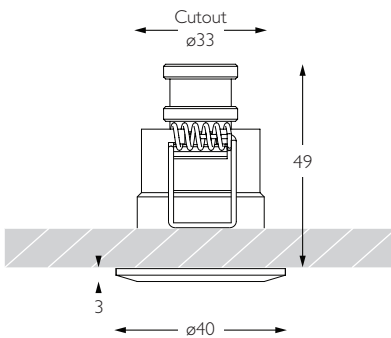


Glare Diagram

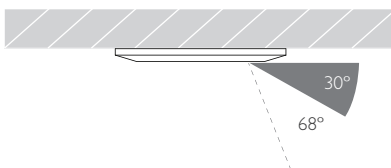

Cut Off: 30°
Glare Comfort Cut Off: 68°

Minimo Fixed Circular is a miniature recessed LED luminaire providing high performance accent lighting from a compact source with minimal glare. With 95CRI, Minimo Fixed is perfect for use in colour-critical applications. Tool-less, site changeable optics allow flexibility in varying environments. Minimo Fixed is machined from aerospace grade 6063-T6 aluminium or brass, and is available as standard in white, black, polished brass, rubbed bronze and brushed aluminium finishes, and delivers a lumen package of 140lm at 1.6W.

Product Photometry independently tested in accordance with LM-79

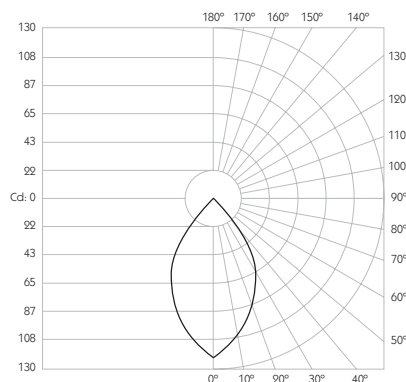

Distance (m)	Beam Diameter (m)	Illuminance (lx)
1m	1.15m	125 lx
2m	2.31m	31 lx
3m	3.46m	14 lx
4m	4.62m	8 lx
5m	5.77m	5 lx

IP 20	95 CRI	CE	ETL US
LED	1.6W	3.2V 500mA	PART L
33	0.5m		



Circular Bezel

	RC-602-AL-XX9560
	RC-602-RB-XX9560
	RC-602-PB-XX9560
	RC-602-BK-XX9560
	RC-602-WH-XX9560

For 3000K Substitute XX with 30 | For 2700K Substitute XX with 27

PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA
t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626