




DRIVER COMPATIBILITY TABLE

ATTO INC. S, R, T and EYE

CONSTANT CURRENT | 1.0W | 350mA

Recommended Drivers to run 1 x Atto Luminaire			
			
Dimming Type	Driver Name	Precision Lighting Order Code	Fits through ø17/27mm Cutout
1-10V (0-10V)	Eldoled 350mA CC 20W 0-10V	PSCC-20-350-A-EL	✗
DALI	Eldoled 350mA CC 20W DALI	PSCC-20-350-D-EL	✗
DMX	Please enquire	-	-
Phase	None available	-	-

Recommended Drivers to run 2 or more Atto Luminaires				
				
Dimming Type	Driver Name	Precision Lighting Order Code	Luminaire Quantity	Fits through ø17/27mm Cutout
1-10V (0-10V)	Eldoled 350mA CC 20W 0-10V	PSCC-20-350-A-EL	1 - 12	✗
DALI	Eldoled 350mA CC 20W DALI	PSCC-20-350-D-EL	1 - 12	✗
DMX	Please enquire	-	-	✗
Phase	None available	-	-	✗


 = Best performing driver


If "Please enquire" then contact technical department and it will be assessed on a case by case basis

Revised 04 April 2018

DRIVER COMPATIBILITY TABLE

MINIMO 1 INC. FIXED, EYE AND TILT VARIATIONS
CONSTANT CURRENT | 1.6W | 500mA

Recommended Drivers to run 1 x Minimo 1 Luminaire			
			
Dimming Type	Driver Name	Precision Lighting Order Code	Fits through ø Cutout
1-10V	TCI Microjolly 1-10V 6W Driver	PSCC-06-500-A-TC	✗
DALI	TCI Minijolly DALI 20 Driver	PSCC-20-500-D-TC	✗
DMX	Please enquire	-	-
Phase	None available	-	-

Recommended Drivers to run 2 or more Minimo 1 Luminaires				
				
Dimming Type	Driver Name	Precision Lighting Order Code	Luminaire Quantity	Fits through ø Cutout
1-10V	TCI Microjolly 1-10V 6W Driver	PSCC-06-500-A-TC	1 - 3	✗
	TCI Minijolly 1-10V 20 Driver	PSCC-20-500-A-TC	1 - 9	✗
DALI	TCI Minijolly DALI 20 Driver	PSCC-20-500-D-TC	1 - 9	✗
DMX	Please enquire	-	-	✗
Phase	None available	-	-	✗



= Best performing driver




If "Please enquire" then contact technical department and it will be assessed on a case by case basis

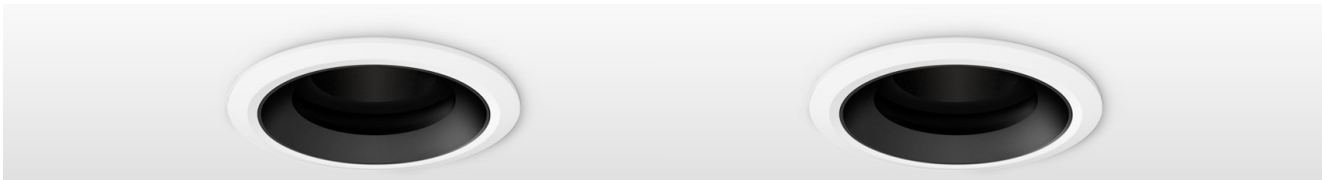


Revised 04 April 2018


DRIVER COMPATIBILITY TABLE

MINIMO 11 - Trim only

CONSTANT CURRENT | 6W | 500mA

Recommended Drivers to run 1 x Minimo 11 Luminaire			
			
Dimming Type	Driver Name	Precision Lighting Order Code	Fits through ø65 Cutout
1-10V	TCI Minijolly 1-10V 20 Driver	PSCC-20-500-A-TC	✓
1-10V 	Eldoled 1-10V 20W Solodrive	PSCC-20-500-A-EL	✓
DALI	TCI Minijolly DALI 20 Driver	PSCC-20-500-D-TC	✓
DALI 	Eldoled DALI 20W Solodrive	PSCC-20-500-D-EL	✓
DMX	Please enquire	-	-
Phase	Please enquire	-	-

Recommended Drivers to run 2 or more Minimo 11 Luminaires				
				
Dimming Type	Driver Name	Precision Lighting Order Code	Luminaire Quantity	Fits through ø65 Cutout
1-10V	TCI Minijolly 1-10V 20 Driver	PSCC-20-500-A-TC	1 - 2	✓
1-10V 	Eldoled 1-10V 20W Solodrive	PSCC-20-500-A-EL	1 - 2	✓
DALI	TCI Minijolly DALI 20 Driver	PSCC-20-500-D-TC	1 - 2	✓
DALI 	Eldoled DALI 20W Solodrive	PSCC-20-500-D-EL	1 - 2	✓
DMX	Please enquire	-	-	-
Phase	None available	-	-	-

 = Best performing driver

If "Please enquire" then contact technical department and it will be assessed on a case by case basis

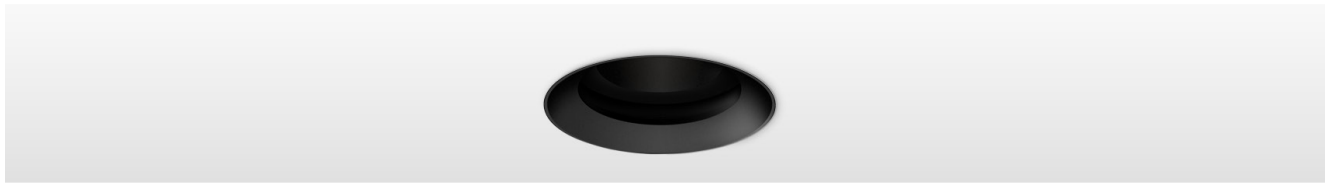
Revised 04 April 2018



DRIVER COMPATIBILITY TABLE

MINIMO 11 - TRIMLESS

CONSTANT CURRENT | 6W | 500mA



Recommended Drivers to run 1 x Minimo 11 TRIMLESS Luminaire




Dimming Type	Driver Name	Precision Lighting Order Code	Fits through ø50 Install Ring
1-10V 	Eldoled 1-10V 20W Solodrive	PSCC-20-500-A-EL	✓
DALI 	Eldoled DALI 20W Solodrive	PSCC-20-500-D-EL	✓
DMX	Please enquire	-	-
Phase	Please enquire	-	-

Recommended Drivers to run 2 or more Minimo 11 TRIMLESS Luminaires



Dimming Type	Driver Name	Precision Lighting Order Code	Luminaire Quantity	Fits through ø50 Install Ring
1-10V 	Eldoled 1-10V 20W Solodrive	PSCC-20-500-A-EL	1 - 2	✓
DALI 	Eldoled DALI 20W Solodrive	PSCC-20-500-D-EL	1 - 2	✓
DMX	Please enquire	-	-	-
Phase	None available	-	-	-

 = Best performing driver




If "Please enquire" then contact technical department and it will be assessed on a case by case basis

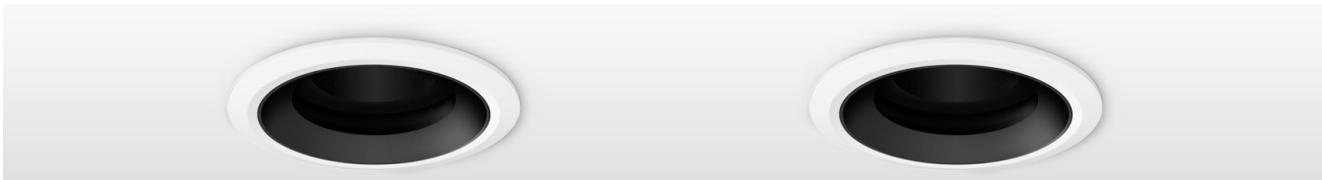


Revised 04 April 2018


DRIVER COMPATIBILITY TABLE

MINIMO 16 - Trim only

CONSTANT CURRENT | 8.4W | 700mA

Recommended Drivers to run 1 x Minimo 16 Luminaire			
			
Dimming Type	Driver Name	Precision Lighting Order Code	Fits through ø65 Cutout
1-10V	TCI Minijolly 1-10V 20 Driver	PSCC-20-700-A-TC	✓
1-10V 	Eldoled 1-10V 20W Solodrive	PSCC-20-700-A-EL	✓
DALI	TCI Minijolly DALI 20 Driver	PSCC-20-700-D-TC	✓
DALI 	Eldoled DALI 20W Solodrive	PSCC-20-700-D-EL	✓
DMX	Please enquire	-	-

Recommended Drivers to run 2 or more Minimo 16 Luminaires				
				
Dimming Type	Driver Name	Precision Lighting Order Code	Luminaire Quantity	Fits through ø65 Cutout
1-10V	TCI Minijolly 1-10V 20 Driver	PSCC-20-700-A-TC	1 - 2	✓
1-10V 	Eldoled 1-10V 20W Solodrive	PSCC-20-700-A-EL	1 - 2	✓
DALI	TCI Minijolly DALI 20 Driver	PSCC-20-700-D-TC	1 - 2	✓
DALI 	Eldoled DALI 20W Solodrive	PSCC-20-700-D-EL	1 - 2	✓
DMX	Please enquire	-	-	-
Phase	Please enquire	-	-	-

 = Best performing driver

If "Please enquire" then contact technical department and it will be assessed on a case by case basis

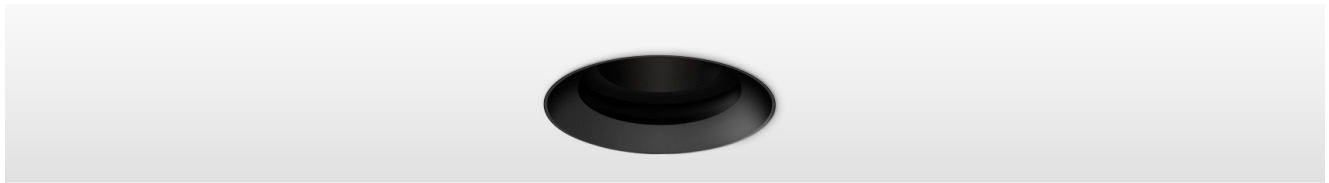
Revised 04 April 2018



DRIVER COMPATIBILITY TABLE

MINIMO 16 - TRIMLESS

CONSTANT CURRENT | 8.4W | 700mA



Recommended Drivers to run 1 x Minimo 16 TRIMLESS Luminaire




Dimming Type	Driver Name	Precision Lighting Order Code	Fits through ø50 Install Ring
1-10V 	Eldoled 1-10V 20W Solodrive	PSCC-20-700-A-EL	✓
DALI 	Eldoled DALI 20W Solodrive	PSCC-20-700-D-EL	✓
DMX	Please enquire	-	-
Phase	Please enquire	-	-

Recommended Drivers to run 2 or more Minimo 16 TRIMLESS Luminaires



Dimming Type	Driver Name	Precision Lighting Order Code	Luminaire Quantity	Fits through ø50 Install Ring
1-10V 	Eldoled 1-10V 20W Solodrive	PSCC-20-700-A-EL	1 - 2	✓
DALI 	Eldoled DALI 20W Solodrive	PSCC-20-700-D-EL	1 - 2	✓
DMX	Please enquire	-	-	-
Phase	Please enquire	-	-	-


 = Best performing driver

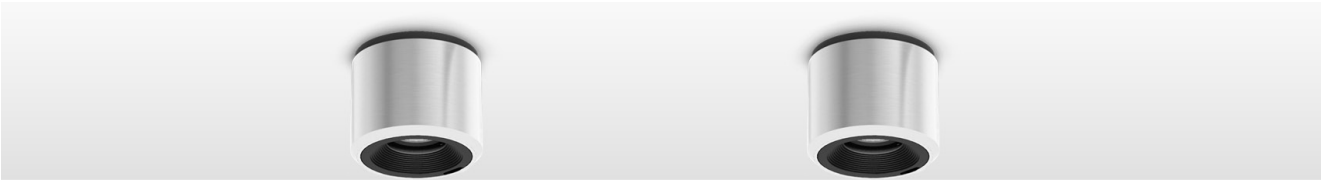
If "Please enquire" then contact technical department and it will be assessed on a case by case basis


Revised 04 April 2018

DRIVER COMPATIBILITY TABLE

DOMINO 1 INC. SURFACE MOUNTED AND RECESSED VERSIONS
CONSTANT CURRENT | 2.2W | 700mA

Recommended Drivers to run 1 x Domino 1			
			
Dimming Type	Driver Name	Precision Lighting Order Code	Fits through \varnothing Cutout
1-10V	TCI Minijolly 1-10V 20 Driver	PSCC-20-700-A-TC	✗
DALI	TCI Minijolly DALI 20 Driver	PSCC-20-700-D-TC	✗
DMX	Please enquire	-	-
Phase	None available	-	-

Recommended Drivers to run 2 or more Domino 1 Luminaires				
				
Dimming Type	Driver Name	Precision Lighting Order Code	Luminaire Quantity	Fits through \varnothing Cutout
1-10V	TCI Minijolly 1-10V 20 Driver	PSCC-20-700-A-TC	1 - 6	✗
	Harvard 1-10V 33W Driver	PSCC-33-700-A-HA	4 - 15	✗
DALI	TCI Minijolly DALI 20 Driver	PSCC-20-700-D-TC	1 - 6	✗
DMX	Please enquire	-	-	-
Phase	Please enquire	-	-	-

 = Best performing driver


If "Please enquire" then contact technical department and it will be assessed on a case by case basis

Revised 04 April 2018


DRIVER COMPATIBILITY TABLE

DOMINO 2 INC. SURFACE MOUNTED AND RECESSED VERSIONS

CONSTANT CURRENT | 4.4W | 700mA

Recommended Drivers to run 1 x Domino 2 Luminaire			
			
Dimming Type	Driver Name	Precision Lighting Order Code	Fits through \varnothing Cutout
1-10V	TCI Minijolly 1-10V 20 Driver	PSCC-20-700-A-TC	✗
DALI	TCI Minijolly DALI 20 Driver	PSCC-20-700-D-TC	✗
DMX	Please enquire	-	-
Phase	None available	-	-

Recommended Drivers to run 2 or more Domino 2 Luminaires				
				
Dimming Type	Driver Name	Precision Lighting Order Code	Luminaire Quantity	Fits through \varnothing Cutout
1-10V	TCI Minijolly 1-10V 20 Driver	PSCC-20-700-A-TC	1 - 3	✗
	Harvard 1-10V 33W Driver	PSCC-33-700-A-HA	2 - 7	✗
DALI	TCI Minijolly DALI 20 Driver	PSCC-20-700-D-TC	1 - 3	✗
DMX	Please enquire	-	-	-
Phase	Please enquire	-	-	-

 = Best performing driver

If "Please enquire" then contact technical department and it will be assessed on a case by case basis


Revised 04 April 2018

DRIVER COMPATIBILITY TABLE

DOMINO 4 INC. SURFACE MOUNTED AND RECESSED VERSIONS
CONSTANT CURRENT | 8.8W | 700mA

Recommended Drivers to run 1 x Domino 4 Luminaire			
			
Dimming Type	Driver Name	Precision Lighting Order Code	Fits through ø Cutout
1-10V	TCI Minijolly 1-10V 20 Driver	PSCC-20-700-A-TC	✗
DALI	TCI Minijolly DALI 20 Driver	PSCC-20-700-D-TC	✗
DMX	Please enquire	-	-
Phase	None available	-	-

Recommended Drivers to run 2 or more Domino 4 Luminaires				
				
Dimming Type	Driver Name	Precision Lighting Order Code	Luminaire Quantity	Fits through ø Cutout
1-10V	Harvard 1-10V 33W Driver	PSCC-33-700-A-HA	1 - 3	✗
DALI	None available	-	-	-
DMX	Please enquire	-	-	-
Phase	Please enquire	-	-	-


 = Best performing driver

If "Please enquire" then contact technical department and it will be assessed on a case by case basis


Revised 04 April 2018

DRIVER COMPATIBILITY TABLE

PICO 1 SURFACE INC. ZOOM, PLUS & LONG SNOOT VARIATIONS
CONSTANT CURRENT | 1.6W | 500mA

Recommended Drivers to run 1 x Pico 1 Surface (MPN) Luminaire			
			
Dimming Type	Driver Name	Precision Lighting Order Code	Fits through \emptyset Cutout
1-10V	TCI Microjolly 1-10V 6W Driver	PSCC-06-500-A-TC	✗
DALI	TCI Minijolly DALI 20 Driver	PSCC-20-500-D-TC	✗
DMX	Please enquire	-	-
Phase	None available	-	-

Recommended Drivers to run 2 or more Pico 1 Surface (MPN) Luminaires				
 				
Dimming Type	Driver Name	Precision Lighting Order Code	Luminaire Quantity	Fits through \emptyset Cutout
1-10V	TCI Microjolly 1-10V 6W Driver	PSCC-06-500-A-TC	1 - 3	✗
	TCI Minijolly 1-10V 20 Driver	PSCC-20-500-A-TC	1 - 9	✗
	Harvard 1-10V 24W Driver	PSCC-24-500-A-HA	4 - 14	✗
DALI	TCI Minijolly DALI 20 Driver	PSCC-20-500-D-TC	1 - 9	✗
	Harvard DALI 24W Driver	PSCC-24-500-D-HA	6 - 14	✗
DMX	Please enquire	-	-	-
Phase	None available	-	-	-

 = Best performing driver

If "Please enquire" then contact technical department and it will be assessed on a case by case basis

Revised 04 April 2018