

# DOMINO 1 BASIS TRACK

Luminaires  
spec sheet BT-651

NARROW SPOT



**Category** Interior use only IP20

**Material** Machined Aluminium

**Finish** Brushed Aluminium

**System** Basis Track

**Accessories** Lenses

**System Power** 2.5W

**Module Output** 178lm

**Absolute Output** 164lm

**LOR** 93%

**Colour Temperature** 3000K\*



**CRI** Ra: 95 **TM-30** Rf: 93 Rg: 99

**Optics** 12°

**Gear Type** Dimmable options available


**Weight** 141g

\* Please enquire as to the availability of non-standard colour temperatures.

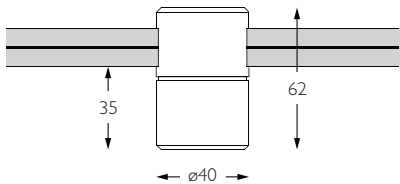


Domino 1 Basis Track is a low profile, track-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in brushed aluminium, and has five changeable optics for flexible distribution. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 1 Basis Track is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 178lm at 2.5W from its internal 24V DC driver.

Product Photometry independently tested in accordance with LM-79

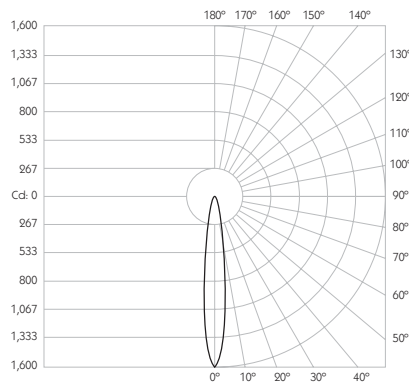


Distance (m)	Beam Diameter (m)	Footcandle (lx)
1m	0.21m	1,566 lx
2m	0.42m	392 lx
3m	0.63m	174 lx
4m	0.84m	98 lx
5m	1.05m	63 lx

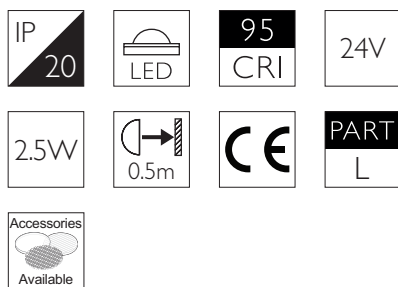

Basis Track

BT-651-AL-309512

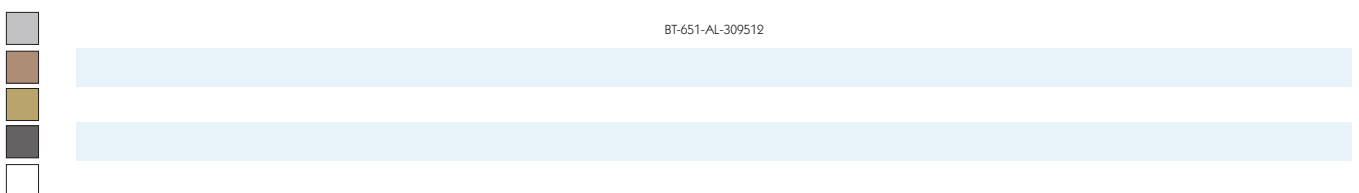

PRECISION  
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK

WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD  
LONDON SW17 0BA

t. +44 (0) 20 8947 6616  
f. +44 (0) 20 8286 6626

# DOMINO 1 BASIS TRACK

Luminaires  
spec sheet BT-651

FLOOD



**Category** Interior use only IP20

**Material** Machined Aluminium

**Finish** Brushed Aluminium

**System** Basis Track

**Accessories** Lenses

**System Power** 2.5W

**Module Output** 178lm

**Absolute Output** 150lm

**LOR** 84%

**Colour Temperature** 3000K\*



**CRI** Ra: 95 **TM-30** Rf: 93 Rg: 99

**Optics** 30°

**Gear Type** Dimmable options available


**Weight** 141g

\* Please enquire as to the availability of non-standard colour temperatures.

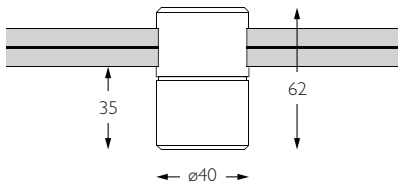


Domino 1 Basis Track is a low profile, track-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in brushed aluminium, and has five changeable optics for flexible distribution. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 1 Basis Track is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 178lm at 2.5W from its internal 24V DC driver.

Product Photometry independently tested in accordance with LM-79

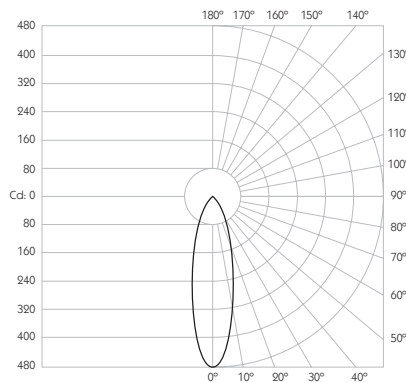


Distance (m)	Beam Diameter (m)	Beam Length (m)	Illuminance (lx)
1m	0.54m	0.54m	470 lx
2m	1.07m	1.07m	118 lx
3m	1.61m	1.61m	52 lx
4m	2.14m	2.14m	29 lx
5m	2.68m	2.68m	19 lx

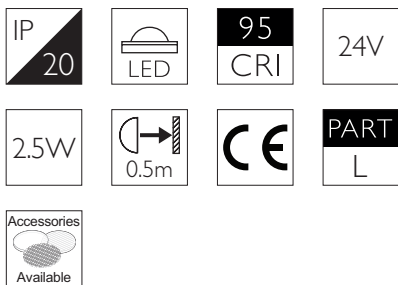

Basis Track

BT-651-AL-309530

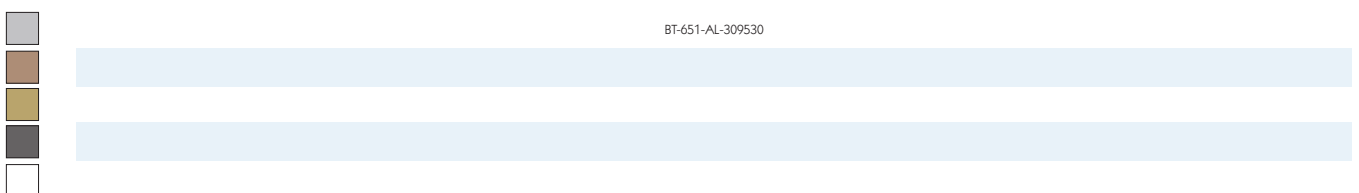

PRECISION  
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK

WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD  
LONDON SW17 0BA

t. +44 (0) 20 8947 6616  
f. +44 (0) 20 8286 6626

# DOMINO 1 BASIS TRACK

Luminaires  
spec sheet BT-651

WIDE FLOOD



**Category** Interior use only IP20

**Material** Machined Aluminium

**Finish** Brushed Aluminium

**System** Basis Track

**Accessories** Lenses

**System Power** 2.5W

**Module Output** 178lm

**Absolute Output** 163lm

**LOR** 92%

**Colour Temperature** 3000K\*



**CRI** Ra: 95 **TM-30** Rf: 93 Rg: 99

**Optics** 60°

**Gear Type** Dimmable options available




**Weight** 141g

\* Please enquire as to the availability of non-standard colour temperatures.

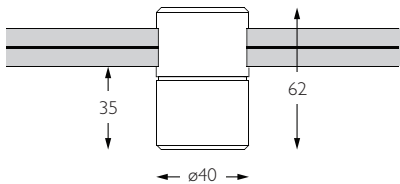


Domino 1 Basis Track is a low profile, track-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in brushed aluminium, and has five changeable optics for flexible distribution. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 1 Basis Track is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 178lm at 2.5W from its internal 24V DC driver.

Product Photometry independently tested in accordance with LM-79

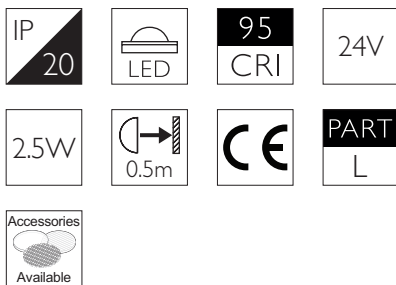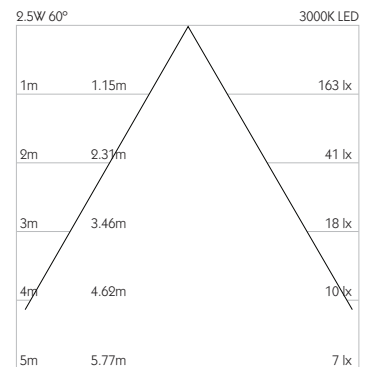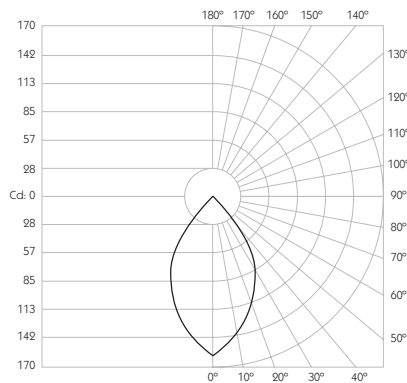

Basis Track

BT-651-AL-309560

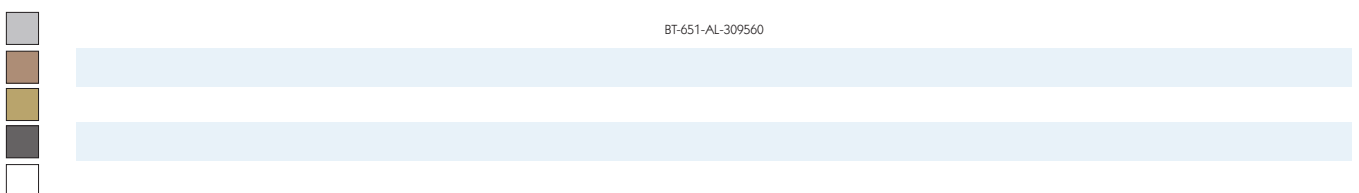

PRECISION  
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK

WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD  
LONDON SW17 0BA

t. +44 (0) 20 8947 6616  
f. +44 (0) 20 8286 6626

# DOMINO 1 BASIS TRACK

Luminaires  
spec sheet BT-651

ELLIPSE



**Category** Interior use only IP20

**Material** Machined Aluminium

**Finish** Brushed Aluminium

**System** Basis Track

**Accessories** Lenses

**System Power** 2.5W

**Module Output** 178lm

**Absolute Output** 163lm

**LOR** 92%

**Colour Temperature** 3000K\*



**CRI** Ra: 95 **TM-30** Rf: 93 Rg: 99

**Optics** 12X35°

**Gear Type** Dimmable options available


**Weight** 141g

\* Please enquire as to the availability of non-standard colour temperatures.

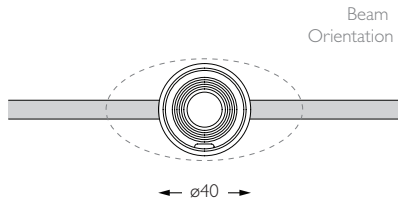
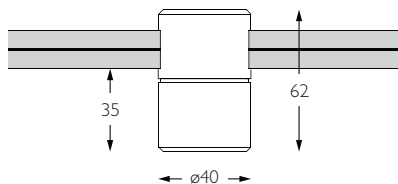


Domino 1 Basis Track is a low profile, track-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in brushed aluminium, and has five changeable optics for flexible distribution. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 1 Basis Track is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 178lm at 2.5W from its internal 24V DC driver.

Product Photometry independently tested in accordance with LM-79

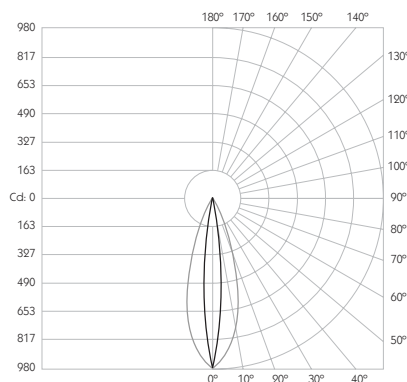

Beam Angle	Beam Diameter (m)	Beam Area (m²)	Footcandle (lx)
12° 35°	0.63m	0.21m	972 lx
24° 70°	1.26m	0.42m	243 lx
36° 105°	1.89m	0.63m	108 lx
48° 140°	2.52m	0.84m	60 lx
60° 175°	3.15m	1.05m	39 lx

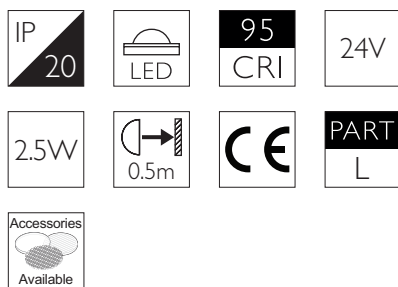

BT-651-AL-3095E1



PRECISION  
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK  
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD  
LONDON SW17 0BA  
t. +44 (0) 20 8947 6616  
f. +44 (0) 20 8286 6626

Version 10.15

# DOMINO 1 BASIS TRACK

Luminaires  
spec sheet BT-651

VERTICAL ELLIPSE



**Category** Interior use only IP20

**Material** Machined Aluminium

**Finish** Brushed Aluminium

**System** Basis Track

**Accessories** Lenses

**System Power** 2.5W

**Module Output** 178lm

**Absolute Output** 163lm

**LOR** 92%

**Colour Temperature** 3000K\*



**CRI** Ra: 95 **TM-30** Rf: 93 Rg: 99

**Optics** 35X12°

**Gear Type** Dimmable options available





**Weight** 141g

\* Please enquire as to the availability of non-standard colour temperatures.

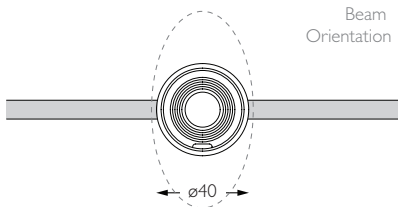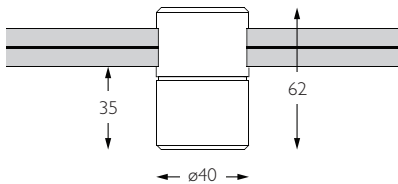


Domino 1 Basis Track is a low profile, track-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in brushed aluminium, and has five changeable optics for flexible distribution. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 1 Basis Track is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 178lm at 2.5W from its internal 24V DC driver.

Product Photometry independently tested in accordance with LM-79

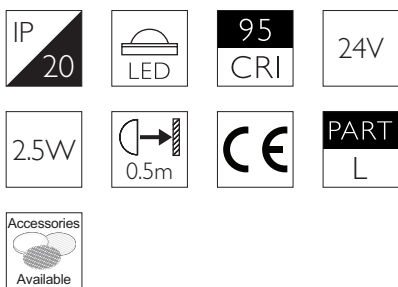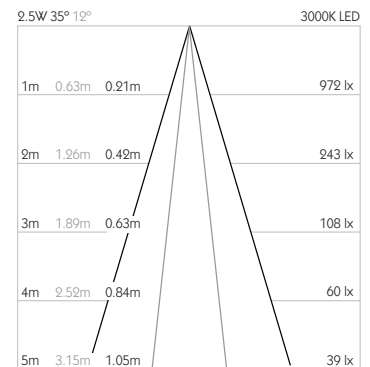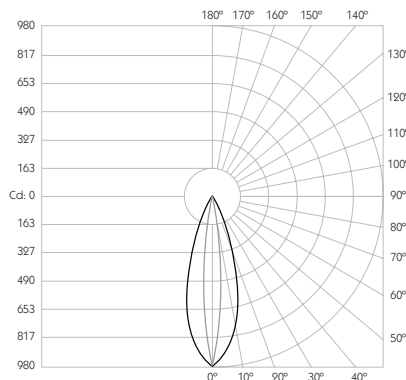

BT-651-AL-3095E2

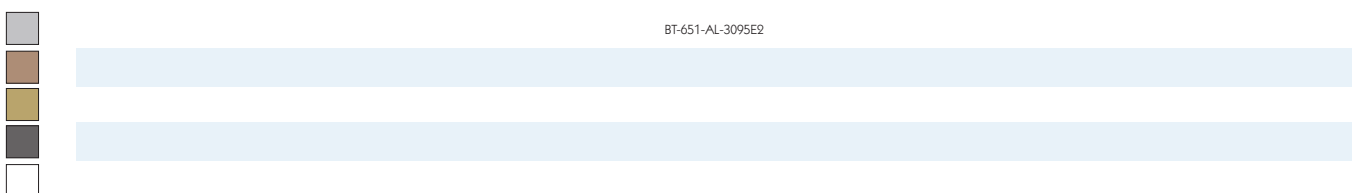

PRECISION  
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK  
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD  
LONDON SW17 0BA  
t. +44 (0) 20 8947 6616  
f. +44 (0) 20 8286 6626

Version 10.15